

TLS 2200[®] Thermal Labeling System



TLS2200 Thermal Labeling System

Part Number	Description
TLS2200	Printer (system includes hard case, R6210 ribbon, battery pack, battery charger, manual, communications cable, test labels (PTL-19-423), one cleaning card)

Adding to its long line of quality performance printers, Brady introduces the ultimate answer to your toughest labeling challenges. The TLS2200 system offers the light weight (2.75 lb./1.25 kg) of a hand-held printer, while providing capabilities such as thermal transfer printing, bar coding and multiple material configurations. New features include memory, banner printing and PC connectivity. Memory makes your work easier by allowing you to create and save legends in lists and then recall them with only a few key-

- ▶ Weight 2.75 lbs. (1.25 kg)
- ▶ Thermal transfer print mechanism 203 dpi (8 dots/mm)
- ▶ Custom TrueType font
- ▶ Labels up to 2" wide (50.8 mm)
- ▶ Print width 1.81" (46 mm)
- ▶ Print length up to 54" (1371 mm)
- ▶ Two line liquid crystal display (LCD), 16 characters wide
- ▶ Operating temperature range: 40°F to 120°F (4°C - 49°C)
- ▶ UL and CUL listed battery charger - 120v/60hz input 9VDC 183ma output
- ▶ FCC Class A approved
- ▶ Prints over 500 labels between battery charges
- ▶ 6 month warranty
- ▶ Adjustable for 6 different widths of labels
- ▶ Built-in industrial label cutter
- ▶ Patent numbers 230, D409, 5,951,177, 6,113,293

ACCESSORIES

TLS2200 Thermal Labeling System Accessories

Part Number	Description
TLS2200-AC	AC adapter
TLS2200-BC	Battery charger
TLS2200-BP	Battery pack
TLS2200-DC	Dust Cover
TLS2200-HC	Hard side carrying case
TLS2200-QC	Quick charger for battery
TLS2200-SC	Soft side users case
TLS2200-CABLE	Communications cable
TLS2200-UPDISKS	Upgrade disks (includes 3.5" disks)
TLS2200-UPKIT	Upgrade kit (includes 3.5" disks and cable)
PCK-5	Cleaning kit (includes 5 cleaning cards)



TLS2200-SC

TLS2200-AC

TLS PC Link™ Thermal Labeling System

PORTABLE PRINTERS
& LABELS



TLS PC Link Thermal Labeling System

Part Number	Description
TLSPC	Printer (system includes LabelMark™ labeling software, rechargeable battery pack, power supply/battery charger, R6210 ribbon, sample labels (PTL-19-423), Quick Start Guide, manuals, communications cable, and Windows drivers.)

ACCESSORIES

TLS PC Link Thermal Labeling System Accessories

Part Number	Description
TLSPC-AC	Power supply/battery charger
TLSPC-BP	Rechargeable battery pack
TLSPC-CABLE	Communications cable
PCK-5	Cleaning Kit (includes 5 cleaning cards)

BULK LABELS

Brady now introduces bulk label capability for the TLS2200 and TLS PC Link thermal labeling systems. Bulk labels are designed to save customers money, and provide the perfect low volume* labeling solution. A reusable dispenser box protects labels from dust and debris, and allows easy storage until the next identification job. Bulk labels utilize Brady's Smart-Cell Technology and allow the TLS2200 and TLS PC Link printers to recognize label sizes and printer settings, automatically eliminating wasted time and materials.

** TLS2200 and TLS PC Link printers are recommended for printing 500 or less labels per day. You may experience a printer slowdown if printing large quantities of labels at one time depending on the material, label size and amount of print coverage.*

Introducing the newest member of the TLS2200 printer family, the TLS PC Link Thermal Labeling System offers a rugged, small and lightweight desktop/portable solution. The printer provides capabilities such as thermal transfer printing, bar coding, and multiple material configurations. The TLS PC Link printer utilizes all of the available TLS2200 materials and ribbons, and also runs the latest bulk rolls of material as well. The included Windows™ drivers allow the unit to print labels from both LabelMark™ (included with TLS PC Link™) and Codesoft™ software, or any Windows software application available. In addition, the printer has its own printer control language, allowing the unit to be integrated with a piece of equipment and precisely printing labels wherever and whenever they are needed. The firmware is upgradeable through the mini-Din serial jack, and the unit operates off AC power or the included rechargeable battery.

- ▶ Weight 2.50 lbs. (1.14 kg)
- ▶ Thermal Transfer print mechanism 203 dpi (8 dots/mm)
- ▶ Custom TrueType font
- ▶ Labels up to 2" wide (50.8 mm)
- ▶ Print width 1.81" (46 mm)
- ▶ Print length up to 6" (152.4 mm)
- ▶ Operating temperature range: 40F to 120F (4C-49C)
- ▶ UL and CUL listed AC adapter/battery charger - 120V/60hz input 12VDC 3000mA output
- ▶ FCC Class A approved
- ▶ Prints over 500 labels between battery charges
- ▶ Adjustable for 6 different widths of labels
- ▶ Built-in industrial label cutter
- ▶ 6 month warranty



TLS2200 / TLS PC LINK THERMAL LABELING SYSTEMS

TLS 2200® / TLS PC Link™ Thermal Transfer Printer

RIBBONS

TLS2200 Thermal Labeling System Ribbon

Part Number	Description	Length
R4310	R4310 black ribbon	75ft (22.5m)
R6010	R6010 black ribbon	75ft (22.5m)
R6210	R6210 black ribbon	75ft (22.5m)
R4410B	R4410 blue ribbon	75ft (22.5m)
R4410R	R4410 red ribbon	75ft (22.5m)
R4410W	R4410 white ribbon	75ft (22.5m)

Ribbon Cross Reference Guide

B#’s	Material	Series R4310	Series R4410 (colors)	Series R6010	Series *R6210
109	Tag	●			
321	Polyolefin				●
342	Polyolefin	●			
351	Vinyl	●			△
400	Vinyl Cloth	●			
412	Polypropylene	△			●
422	Polyester		●UL/CSA	●UL/CSA	△
423	Polyester		●UL/CSA	●UL/CSA/AGA	△
424	Paper	●			
426	Polyimide	●			
427	Vinyl	●UL/CSA			●
428	Polyester	●UL/CSA/AGA			
430	Polyester		●UL/CSA	●UL/CSA	△
435	Polyester		●UL/CSA	●UL/CSA	
437	Tedlar®	●			△
439	Vinyl		●	●	△
457	Polyimide		●UL	●UL	
459	Polyester		●UL/CSA	●UL/CSA	
473	Polyester		●UL/CSA	●UL/CSA	△
477	Polyimide		●UL	●UL	△
483	Polyester		●UL/CSA	●UL/CSA	△
486	Polyester	●UL/CSA			
489	Polyester	●UL/CSA			
499	Nylon Cloth	●UL			△
642	Tedlar®	●			△

Tedlar® is a registered trademark of DuPont.




























●	Recommended ribbon for use with respective material.
△	Acceptable ribbon for use with respective material.
*UL/CSA	Approval Pending.
UL	These materials are UL recognized with its respective ribbon.
CSA	These materials are CSA approved with its respective ribbon.
UL/CSA	These materials are UL & CSA approved with its respective ribbon.
AGA	These materials are AGA approved.
*	R6210 ribbon included with printer.

VARIABLE FONT SIZES





Font sizes range from 1 (4 point) to 19 (72 point). The maximum font size available depends on factors such as label size, number of characters, number of lines, as well as font sizes in other lines.

Font Number	Point Size	Print Sample
1	4	ABC 12345
2	5	ABC 12345
3	6	ABC 12345
4	7	ABC 12345
5	9	ABC 12345
6	10	ABC 12345
7	11	ABC 12345
8	13	ABC 12345
9	14	ABC 12345
10	17	ABC 12345
11	20	ABC 12345
12	23	ABC 12345
13	26	ABC 12345
14	28	ABC 1234
(PC Link Only)	35	ABC 12
15	36	ABC 12
16	45	ABC 1
17	51	ABC 1
18	56	ABC
(PC Link Only)	70	ABC
19	72	ABC

TLS 2200® / TLS PC Link™ Materials Chart

Type	Max. Service Temp. °F (°C)	Color	Finish	Use	Special Properties
NYLON CLOTH					
B-499	194 (90) 30 days	White	Matte	Low profile through-conduit wire marking, component and general labeling	High adhesion makes all-purpose wire marker ideal for environments where heat, oil and dirt are present; UL recognized/CSA accepted  
PAPER					
B-424	158 (70) 30 days	White	Matte	Bar code and general labeling	Good contrast and smear resistance
POLYESTER					
B-422	212 (100) 30 days	White	Gloss	Electronic PCB ID and component; bar code label and rating plates; outlet and patch panel identification	UL recognized/CSA accepted; 2 mil adhesive recommended for application on textured surfaces  
B-423	248 (120) 30 days	White	Gloss	Electronic PCB ID and component; bar code label, rating plates and outlets	UL recognized/CSA accepted/AGA accepted   
B-428	176 (80) 30 days	Silver	Matte	Rating plates; electronic component marking	UL recognized/CSA accepted/AGA accepted   
B-430	212 (100) 30 days	Clear	Gloss	General labeling rating/name plates, outlet and general communications	Translucent; UL recognized/CSA accepted  
B-435	212 (100) 30 days	Silver	Gloss	Rating plates and general labeling	Designed to withstand solvents while maintaining excellent image quality; UL recognized/CSA accepted/AGA accepted   
B-459	212 (100) 30 days	White	Matte	Electronic PCB ID and component; bar code labeling and rating plates	UL recognized/CSA accepted  
B-473	356 (180) 5 min.	White	Gloss	Electronic PCB ID and component; bar code labeling and rating plates	Static dissipative adhesive; UL recognized/CSA accepted   
B-483	212 (100) 30 days	White	Gloss	General labeling; bar code label and rating plates	Ultra-aggressive adhesive for thermal transfer printing, designed for powder coated surfaces; UL recognized/CSA accepted  
B-486	248 (120) 30 days	Silver	Matte	General labeling; bar code labeling and rating plates	Ultra-aggressive adhesive for oily, greasy, and powder coated surfaces; UL recognized/CSA accepted  
B-489	212 (100) 30 days	White	Matte	General labeling; bar code labeling and rating plates	Ultra-aggressive adhesive for oily, greasy, and powder coated surfaces; UL/CSA approval pending
POLYETHYLENE					
B-109	120 (49) 30 days	White	Matte	Multi-purpose identification tag, where durability is required	Cross-laminated polyethylene provides extreme tear resistance and excellent cold-weather performance
POLYIMIDE					
B-426	572 (300) 5 min.	Amber	Matte	Underside PCB ID and other high temperature, high performance applications	Withstands extremely high temperatures
B-457	500 (260) 5 min.	White	Gloss	Top- or bottom-side board application for SMT or Through hole	Good contrast and smear resistance; UL recognized 
B-477	500 (260) 5 min.	White	Gloss	Top- or bottom-side board application for SMT or Through hole	Static dissipative adhesive; UL recognized  
POLYOLEFIN					
B-321	221 (105) 30 days	White	Matte	Wire marking	Heat-shrinkable
B-342	267 (130) 30 days	White/ Yellow	Matte	Wire marking	3-to-1 shrink ratio; self-extinguishing, meets the material and physical property of MIL-DTL-23053/5 Class 1, MIL-M-81531, MIL-STD-202F; Method 215 and UL 224
POLYPROPYLENE					
B-412	212 (100) 30 days	White	Matte	Wire, cable and product inventory information	Designed for outdoor and harsh environmental applications or where tensile strength is needed
TEDLAR®					
B-437	275 (135) 30 days	White/ Yellow	Matte	Aerospace and military cable marking	Self-extinguishing
B-642	266 (130) 30 days	White	Matte	Self-laminating; wire and cable marking	Self-extinguishing, low smoke and flame spread; Excellent abrasion and smudge resistance
VINYL					
B-351	212 (100) 30 days	White	Matte	Tamper-evident labels	Designed to fracture easily; solvent resistant & flexible
B-427	158 (70) 30 days	White	Matte	Self-laminating wire and cable marking	Excellent abrasion and smudge resistance  
B-439	104 (40) 30 days	White/ Yellow/ Orange/ Red	Matte	Pathway, racks, voltage markers, wire bundle, rating plates and general labeling	Various colors available
VINYL CLOTH					
B-400	175 (79) 30 days	White	Matte	Wire and terminal block marking; component and general labeling	Good smudge resistance; repositionable on flat surfaces; wire, cable and component identification

Tedlar® is a registered trademark of DuPont.

	These materials have static dissipative adhesives.
	These materials are UL recognized.
	These materials are CSA approved.
	These materials are AGA approved.

Index by Part Number

PORTABLE PRINTERS & LABELS

TLS2200 / TLS PC LINK LABELS INDEX BY PART NUMBER

Part Number	Size Inch (mm)	Specifications on Page
BPTL-11-400	.50 x .75 (12.70 x 19.05)	12
BPTL-11-427	.50 x .75 (12.70 x 19.05)	12
BPTL-11-499	.50 x .75 (12.70 x 19.05)	12
BPTL-12-109	.75 x 3.00 (19.05 x 76.20)	13
BPTL-16-423	1.00 x .375 (25.40 x 9.53)	13
BPTL-17-423	1.00 x .50 (25.40 x 12.70)	14
BPTL-17-427	.50 x 1.00 (12.70 x 25.40)	12
BPTL-17-428	1.00 x .50 (25.40 x 12.70)	14
BPTL-18-400	.75 x 1.00 (19.05 x 25.40)	13
BPTL-18-427	.75 x 1.00 (19.05 x 25.40)	13
BPTL-19-400	1.00 x 1.00 (25.40 x 25.40)	14
BPTL-19-423	1.00 x 1.00 (25.40 x 25.40)	14
BPTL-19-427	1.00 x 1.00 (25.40 x 25.40)	14
BPTL-20-422	2.00 x 1.00 (50.80 x 25.40)	17
BPTL-20-423	2.00 x 1.00 (50.80 x 25.40)	17
BPTL-20-424	2.00 x 1.00 (50.80 x 25.40)	17
BPTL-20-428	2.00 x 1.00 (50.80 x 25.40)	17
BPTL-21-427	1.00 x 2.5 (25.40 x 63.50)	14
BPTL-23-427	1.00 X 4.00 (25.40 x 101.60)	15
BPTL-29-400	.50 x 1.50 (12.70 x 38.10)	12
BPTL-29-423	1.50 x .50 (38.10 x 12.70)	15
BPTL-29-427	.50 x 1.50 (12.70 x 38.10)	12
BPTL-30-427	.75 x 1.50 (19.05 x 38.10)	13
BPTL-31-427	1.00 x 1.50 (25.40 x 38.10)	14
BPTL-32-427	1.50 x 1.50 (38.10 x 38.10)	14
BPTL-33-427	1.50 x 4.0 (38.10 x 101.60)	16
BPTL-34-427	1.50 x 6.0 (38.10 x 152.40)	16
BPTL-40-412	1.938 x .375 (49.23 x 9.53)	16
BPSPT-094-1W	1.015 x .182 (25.78 x 4.62)	20
BPSPT-094-175W	1.765 x .182 (44.83 x 4.62)	20
BPSPT-125-1W	1.015 x .235 (25.78 x 5.96)	20
BPSPT-125-175W	1.765 x .235 (44.83 x 5.96)	20
BPSPT-187-1W	1.015 x .335 (25.78 x 8.50)	20
BPSPT-187-175W	1.765 x .335 (44.83 x 8.50)	20
BPSPT-250-1W	1.015 x .439 (25.78 x 11.15)	20
BPSPT-250-175W	1.765 x .439 (44.83 x 11.15)	20
BPSPT-375-1W	1.015 x .645 (25.78 x 16.38)	20
BPSPT-375-175W	1.765 x .645 (44.83 x 16.38)	20
BPSPT-500-1W	1.015 x .851 (25.78 x 21.61)	20
BPSPT-500-175W	1.765 x .851 (44.83 x 21.61)	20
BPSPT-1000-175W	1.765 x 1.660 (44.83 x 42.16)	20
BPTLTB-400-240	240 (60.9) x continuous	21
BPTLTB-400-318	318 (80.7) x continuous	21
BPTLTB-400-375	375 (95.3) x continuous	21
PSPT-094-1W	1.015 x .182 (25.78 x 4.62)	20
PSPT-094-1Y	1.015 x .182 (25.78 x 4.62)	20
PSPT-094-175W	1.765 x .182 (44.83 x 4.62)	20
PSPT-094-175Y	1.765 x .182 (44.83 x 4.62)	20
PSPT-125-1W	1.015 x .235 (25.78 x 5.96)	20
PSPT-125-1Y	1.015 x .235 (25.78 x 5.96)	20
PSPT-125-175W	1.765 x .235 (44.83 x 5.96)	20
PSPT-125-175Y	1.765 x .235 (44.83 x 5.96)	20
PSPT-187-1W	1.015 x .335 (25.78 x 8.50)	20
PSPT-187-1Y	1.015 x .335 (25.78 x 8.50)	20
PSPT-187-175W	1.765 x .335 (44.83 x 8.50)	20
PSPT-187-175Y	1.765 x .335 (44.83 x 8.50)	20
PSPT-250-1W	1.015 x .439 (25.78 x 11.15)	20
PSPT-250-1Y	1.015 x .439 (25.78 x 11.15)	20
PSPT-250-175W	1.765 x .439 (44.83 x 11.15)	20
PSPT-250-175Y	1.765 x .439 (44.83 x 11.15)	20
PSPT-375-1W	1.015 x .645 (25.78 x 16.38)	20
PSPT-375-1Y	1.015 x .645 (25.78 x 16.38)	20
PSPT-375-175W	1.765 x .645 (44.83 x 16.38)	20
PSPT-375-175Y	1.765 x .645 (44.83 x 16.38)	20
PSPT-500-1W	1.015 x .851 (25.78 x 21.61)	20
PSPT-500-1Y	1.015 x .851 (25.78 x 21.61)	20
PSPT-500-175W	1.765 x .851 (44.83 x 21.61)	20
PSPT-500-175Y	1.765 x .851 (44.83 x 21.61)	20
PSPT-1000-1W	1.015 x 1.660 (25.78 x 42.16)	20
PSPT-1000-1Y	1.015 x 1.660 (25.78 x 42.16)	20
PSPT-1000-175W	1.765 x 1.660 (44.83 x 42.16)	20
PSPT-1000-175Y	1.765 x 1.660 (44.83 x 42.16)	20
PTL-1-423	.25 x .25 (6.35 x 6.35)	11
PTL-1-426	.25 x .25 (6.35 x 6.35)	11

Part Number	Size Inch (mm)	Specifications on Page
PTL-1-457	.25 x .25 (6.35 x 6.35)	11
PTL-1-473	.25 x .25 (6.35 x 6.35)	11
PTL-1-477	.25 x .25 (6.35 x 6.35)	11
PTL-2-423	2.00 x .25 (50.80 x 6.35)	17
PTL-2-426	2.00 x .25 (50.80 x 6.35)	17
PTL-2-457	2.00 x .25 (50.80 x 6.35)	17
PTL-2-477	2.00 x .25 (50.80 x 6.35)	17
PTL-3-423	.375 x .375 (9.53 x 9.53)	11
PTL-3-426	.375 x .375 (9.53 x 9.53)	11
PTL-3-457	.375 x .375 (9.53 x 9.53)	11
PTL-3-477	.375 x .375 (9.53 x 9.53)	11
PTL-4-423	.40 x .40 (10.16 x 10.16)	11
PTL-4-426	.40 x .40 (10.16 x 10.16)	11
PTL-4-457	.40 x .40 (10.16 x 10.16)	11
PTL-5-422	.50 x .20 (12.70 x 5.08)	12
PTL-5-423	.50 x .20 (12.70 x 5.08)	12
PTL-5-473	.50 x .20 (12.70 x 5.08)	12
PTL-6-423	.50 x .275 (12.70 x 6.98)	12
PTL-6-426	.50 x .275 (12.70 x 6.98)	12
PTL-6-430	.50 x .275 (12.70 x 6.98)	12
PTL-6-457	.50 x .275 (12.70 x 6.98)	12
PTL-6-473	.50 x .275 (12.70 x 6.98)	12
PTL-7-400	.50 x .50 (12.70 x 12.70)	12
PTL-7-422	.50 x .50 (12.70 x 12.70)	12
PTL-7-423	.50 x .50 (12.70 x 12.70)	12
PTL-7-430	.50 x .50 (12.70 x 12.70)	12
PTL-7-499	.50 x .50 (12.70 x 12.70)	12
PTL-8-400	.50 (12.70) x continuous	12
PTL-8-422	.50 (12.70) x continuous	12
PTL-8-423	.50 (12.70) x continuous	12
PTL-8-428	.50 (12.70) x continuous	12
PTL-8-430	.50 (12.70) x continuous	12
PTL-8-439	.50 (12.70) x continuous	12
PTL-8-439OR	.50 (12.70) x continuous	12
PTL-8-439-RD	.50 (12.70) x continuous	12
PTL-8-439YL	.50 (12.70) x continuous	12
PTL-9-423	.65 x .20 (16.51 x 5.08)	13
PTL-9-426	.65 x .20 (16.51 x 5.08)	13
PTL-9-437	.65 x .20 (16.51 x 5.08)	13
PTL-9-457	.65 x .20 (16.51 x 5.08)	13
PTL-9-473	.65 x .20 (16.51 x 5.08)	13
PTL-9-477	.65 x .20 (16.51 x 5.08)	13
PTL-10-400	.25 x .75 (6.35 x 19.05)	11
PTL-10-423	.75 x .25 (19.05 x 6.35)	13
PTL-10-426	.75 x .25 (19.05 x 6.35)	13
PTL-10-427	.25 x .75 (6.35 x 19.05)	11
PTL-10-427-YL	.25 x .75 (6.35 x 19.05)	11
PTL-10-437	.75 x .25 (19.05 x 6.35)	13
PTL-10-457	.75 x .25 (19.05 x 6.35)	13
PTL-10-473	.75 x .25 (19.05 x 6.35)	13
PTL-10-477	.75 x .25 (19.05 x 6.35)	13
PTL-11-400	.50 x .75 (12.70 x 19.05)	12
PTL-11-427	.50 x .75 (12.70 x 19.05)	12
PTL-11-427-YL	.50 x .75 (12.70 x 19.05)	12
PTL-11-499	.50 x .75 (12.70 x 19.05)	12
PTL-12-109	.75 x 3.00 (19.05 x 76.20)	13
PTL-13-423	.90 x .25 (22.86 x 6.35)	13
PTL-13-426	.90 x .25 (22.86 x 6.35)	13
PTL-13-457	.90 x .25 (22.86 x 6.35)	13
PTL-14-423	1.00 x .187 (25.40 x 4.74)	13
PTL-14-457	1.00 x .187 (25.40 x 4.74)	13
PTL-14-477	1.00 x .187 (25.40 x 4.74)	13
PTL-15-400	1.00 x .275 (25.40 x 6.98)	13
PTL-15-423	1.00 x .275 (25.40 x 6.98)	13
PTL-15-428	1.00 x .275 (25.40 x 6.98)	13
PTL-15-437	1.00 x .275 (25.40 x 6.98)	13
PTL-16-400	.375 x 1.00 (9.53 x 25.40)	11
PTL-16-422	1.00 x .375 (25.40 x 9.53)	13
PTL-16-423	1.00 x .375 (25.40 x 9.53)	13
PTL-16-426	1.00 x .375 (25.40 x 9.53)	13
PTL-16-430	1.00 x .375 (25.40 x 9.53)	14
PTL-16-457	1.00 x .375 (25.40 x 9.53)	14
PTL-16-473	1.00 x .375 (25.40 x 9.53)	14
PTL-16-483	1.00 x .375 (25.40 x 9.53)	14

Part Number	Size Inch (mm)	Specifications on Page
PTL-16-486	1.00 x .375 (25.40 x 9.53)	14
PTL-16-489	1.00 x .375 (25.40 x 9.53)	14
PTL-16-499	.375 x 1.00 (9.53 x 25.40)	11
PTL-17-351	1.00 x .50 (25.40 x 12.70)	14
PTL-17-400	1.00 x .50 (25.40 x 12.70)	14
PTL-17-422	1.00 x .50 (25.40 x 12.70)	14
PTL-17-423	1.00 x .50 (25.40 x 12.70)	14
PTL-17-426	1.00 x .50 (25.40 x 12.70)	14
PTL-17-427	.50 x 1.00 (12.70 x 25.40)	12
PTL-17-427-YL	.50 x 1.00 (12.70 x 25.40)	12
PTL-17-428	1.00 x .50 (25.40 x 12.70)	14
PTL-17-430	1.00 x .50 (25.40 x 12.70)	14
PTL-17-473	1.00 x .50 (25.40 x 12.70)	14
PTL-17-483	1.00 x .50 (25.40 x 12.70)	14
PTL-17-486	1.00 x .50 (25.40 x 12.70)	14
PTL-17-489	1.00 x .50 (25.40 x 12.70)	14
PTL-18-400	.75 x 1.00 (19.05 x 25.40)	13
PTL-18-427	.75 x 1.00 (19.05 x 25.40)	13
PTL-18-427-YL	.75 x 1.00 (19.05 x 25.40)	13
PTL-18-499	.75 x 1.00 (19.05 x 25.40)	13
PTL-19-400	1.00 x 1.00 (25.40 x 25.40)	14
PTL-19-422	1.00 x 1.00 (25.40 x 25.40)	14
PTL-19-423	1.00 x 1.00 (25.40 x 25.40)	14
PTL-19-427	1.00 x 1.00 (25.40 x 25.40)	14
PTL-19-483	1.00 x 1.00 (25.40 x 25.40)	14
PTL-19-486	1.00 x 1.00 (25.40 x 25.40)	14
PTL-19-489	1.00 x 1.00 (25.40 x 25.40)	14
PTL-19-499	1.00 x 1.00 (25.40 x 25.40)	14
PTL-19-642	1.00 x 1.00 (25.40 x 25.40)	14
PTL-20-351	2.00 x 1.00 (50.80 x 25.40)	17
PTL-20-422	2.00 x 1.00 (50.80 x 25.40)	17
PTL-20-423	2.00 x 1.00 (50.80 x 25.40)	17
PTL-20-424	2.00 x 1.00 (50.80 x 25.40)	17
PTL-20-428	2.00 x 1.00 (50.80 x 25.40)	17
PTL-20-459	2.00 x 1.00 (50.80 x 25.40)	17
PTL-20-483	2.00 x 1.00 (50.80 x 25.40)	17
PTL-20-486	2.00 x 1.00 (50.80 x 25.40)	17
PTL-20-489	2.00 x 1.00 (50.80 x 25.40)	17
PTL-21-400	1.00 x 2.5 (25.40 x 63.50)	14
PTL-21-427	1.00 x 2.5 (25.40 x 63.50)	14
PTL-21-427-BL	1.00 x 2.5 (25.40 x 63.50)	14
PTL-21-427-BR	1.00 x 2.5 (25.40 x 63.50)	14
PTL-21-427-GN	1.00 x 2.5 (25.40 x 63.50)	14
PTL-21-427-GY	1.00 x 2.5 (25.40 x 63.50)	14
PTL-21-427-OR	1.00 x 2.5 (25.40 x 63.50)	14
PTL-21-427-PL	1.00 x 2.5 (25.40 x 63.50)	14
PTL-21-427-RD	1.00 x 2.5 (25.40 x 63.50)	14
PTL-21-427-YL	1.00 x 2.5 (25.40 x 63.50)	14
PTL-21-499	1.00 x 2.5 (25.40 x 63.50)	14
PTL-21-642	1.00 x 2.5 (25.40 x 63.50)	14
PTL-22-422	3.00 X 1.00 (76.20 x 25.40)	17
PTL-22-423	3.00 X 1.00 (76.20 x 25.40)	17
PTL-22-424	3.00 X 1.00 (76.20 x 25.40)	17
PTL-22-428	3.00 X 1.00 (76.20 x 25.40)	17
PTL-22-459	3.00 X 1.00 (76.20 x 25.40)	17
PTL-23-400	1.00 X 4.00 (25.40 x 101.60)	15
PTL-23-422	4.00 X 1.00 (101.60 x 25.40)	17
PTL-23-423	4.00 X 1.00 (101.60 x 25.40)	17
PTL-23-427	1.00 X 4.00 (25.40 x 101.60)	15
PTL-23-427-BL	1.00 X 4.00 (25.40 x 101.60)	15
PTL-23-427-BR	1.00 X 4.00 (25.40 x 101.60)	15
PTL-23-427-GN	1.00 X 4.00 (25.40 x 101.60)	15
PTL-23-427-GY	1.00 X 4.00 (25.40 x 101.60)	15
PTL-23-427-OR	1.00 X 4.00 (25.40 x 101.60)	15
PTL-23-427-PL	1.00 X 4.00 (25.40 x 101.60)	15
PTL-23-427-RD	1.00 X 4.00 (25.40 x 101.60)	15
PTL-23-427-YL	1.00 X 4.00 (25.40 x 101.60)	15
PTL-24-423-BK	113 x .50 (28.70 x 12.70)	15
PTL-24-428-BK	113 x .50 (28.70 x 12.70)	15
PTL-24-483-BK	113 x .50 (28.70 x 12.70)	15
PTL-24-486-BK	113 x .50 (28.70 x 12.70)	15
PTL-25-423	1.25 x .25 (31.75 x 6.35)	15
PTL-25-426	1.25 x .25 (31.75 x 6.35)	15
PTL-25-457	1.25 x .25 (31.75 x 6.35)	15

Index by Part Number

CONTINUED

PORTABLE PRINTERS & LABELS


TLS2200 / TLS PC LINK LABELS INDEX BY PART NUMBER

Part Number	Size Inch (mm)	Specifications on Page	Part Number	Size Inch (mm)	Specifications on Page	Part Number	Size Inch (mm)	Specifications on Page
PTL-25-477	1.25 x .25 (31.75 x 6.35)	15	PTL-31-427-GN	1.00 x 1.50 (25.40 x 38.10)	14	PTL-42-439YL	1.00 (25.40) x continuous	15
PTL-26-423	2.75 X 1.25 (69.85 x 31.75)	17	PTL-31-427-GY	1.00 x 1.50 (25.40 x 38.10)	14	PTL-42-483	1.00 (25.40) x continuous	15
PTL-26-428	2.75 X 1.25 (69.85 x 31.75)	17	PTL-31-427-OR	1.00 x 1.50 (25.40 x 38.10)	14	PTL-43-422	1.90 (48.26) x continuous	15
PTL-26-459	2.75 X 1.25 (69.85 x 31.75)	17	PTL-31-427-RD	1.00 x 1.50 (25.40 x 38.10)	14	PTL-43-430	1.90 (48.26) x continuous	15
PTL-27-423	1.50 x .125 (38.10 x 3.18)	15	PTL-31-427-YL	1.00 x 1.50 (25.40 x 38.10)	14	PTL-43-439	1.90 (48.26) x continuous	15
PTL-27-426	1.50 x .125 (38.10 x 3.18)	15	PTL-31-483	1.00 x 1.50 (25.40 x 38.10)	14	PTL-43-439OR	1.90 (48.26) x continuous	15
PTL-27-457	1.50 x .125 (38.10 x 3.18)	15	PTL-31-486	1.50 x 1.00 (38.10 x 25.40)	16	PTL-43-439RD	1.90 (48.26) x continuous	15
PTL-27-477	1.50 x .125 (38.10 x 3.18)	15	PTL-31-489	1.50 x 1.00 (38.10 x 25.40)	16	PTL-43-439YL	1.90 (48.26) x continuous	15
PTL-28-400	.25 x 1.5 (6.35 x 38.10)	11	PTL-31-499	1.00 x 1.50 (25.40 x 38.10)	14	PTL-43-483	1.90 (48.26) x continuous	15
PTL-28-423	1.50 x .125 (38.10 x 3.18)	15	PTL-31-642	1.00 x 1.50 (25.40 x 38.10)	14	PTL-44-422	.50 x .375 (12.70 x 9.52)	12
PTL-28-426	1.50 x .125 (38.10 x 3.18)	15	PTL-32-400	1.50 x 1.50 (38.10 x 38.10)	16	PTL-44-430	.50 x .375 (12.70 x 9.52)	12
PTL-28-427	.25 x 1.50 (6.35 x 38.10)	11	PTL-32-422	1.50 x 1.50 (38.10 x 38.10)	16	PTL-45-422	1.50 x .375 (38.10 x 9.525)	15
PTL-28-427-BL	.25 x 1.50 (6.35 x 38.10)	11	PTL-32-423	1.50 x 1.50 (38.10 x 38.10)	16	PTL-45-430	1.50 x .375 (38.10 x 9.525)	15
PTL-28-427-BR	.25 x 1.50 (6.35 x 38.10)	11	PTL-32-427	1.50 x 1.50 (38.10 x 38.10)	16	PTL-46-422	.375 (9.53) x continuous	11
PTL-28-427-GN	.25 x 1.50 (6.35 x 38.10)	11	PTL-32-427-BL	1.50 x 1.50 (38.10 x 38.10)	16	PTL-46-430	.375 (9.53) x continuous	11
PTL-28-427-GY	.25 x 1.50 (6.35 x 38.10)	11	PTL-32-427-GN	1.50 x 1.50 (38.10 x 38.10)	16	PTLCM-41-437W	1.50 (38.10) x continuous	16
PTL-28-427-OR	.25 x 1.50 (6.35 x 38.10)	11	PTL-32-427-GY	1.50 x 1.50 (38.10 x 38.10)	16	PTLCM-41-437Y	1.50 (38.10) x continuous	16
PTL-28-427-PL	.25 x 1.50 (6.35 x 38.10)	11	PTL-32-427-OR	1.50 x 1.50 (38.10 x 38.10)	16	PTLSL-17-473	1.00 x .50 (25.40 x 12.70)	14
PTL-28-427-RD	.25 x 1.50 (6.35 x 38.10)	11	PTL-32-427-PL	1.50 x 1.50 (38.10 x 38.10)	16	PTLTB-400-240	.240 (6.09) x continuous	11
PTL-28-427-YL	.25 x 1.50 (6.35 x 38.10)	11	PTL-32-427-RD	1.50 x 1.50 (38.10 x 38.10)	16	PTLTB-400-318	.318 (8.07) x continuous	11
PTL-28-430	1.50 x .25 (38.10 x 6.35)	15	PTL-32-427-YL	1.50 x 1.50 (38.10 x 38.10)	16	PTLTB-400-375	.375 (9.53) x continuous	11
PTL-28-457	1.50 x .25 (38.10 x 6.35)	15	PTL-32-483	1.50 x 1.50 (38.10 x 38.10)	16	PTPSL-17-422	1.00 x .50 (25.40 x 12.70)	26
PTL-28-473	1.50 x .25 (38.10 x 6.35)	15	PTL-32-486	1.50 x 1.50 (38.10 x 38.10)	16	PTPSL-17-424	1.00 x .50 (25.40 x 12.70)	26
PTL-28-477	1.50 x .25 (38.10 x 6.35)	15	PTL-32-489	1.50 x 1.50 (38.10 x 38.10)	16	PTPSL-17-428	1.00 x .50 (25.40 x 12.70)	26
PTL-28-499	.25 x 1.50 (6.35 x 38.10)	11	PTL-33-400	1.50 x 4.0 (38.10 x 101.60)	16	PTPSL-17-483	1.00 x .50 (25.40 x 12.70)	26
PTL-29-400	.50 x 1.50 (12.70 x 38.10)	12	PTL-33-427	1.50 x 4.0 (38.10 x 101.60)	16	PTPSL-20-422	2.00 x 1.00 (50.80 x 25.40)	26
PTL-29-422	1.50 x .50 (38.10 x 12.70)	15	PTL-33-427-BL	1.50 x 4.0 (38.10 x 101.60)	16	PTPSL-20-424	2.00 x 1.00 (50.80 x 25.40)	26
PTL-29-423	1.50 x .50 (38.10 x 12.70)	15	PTL-33-427-BR	1.50 x 4.0 (38.10 x 101.60)	16	PTPSL-20-428	2.00 x 1.00 (50.80 x 25.40)	26
PTL-29-427	.50 x 1.50 (12.70 x 38.10)	12	PTL-33-427-GN	1.50 x 4.0 (38.10 x 101.60)	16	PTPSL-20-483	2.00 x 1.00 (50.80 x 25.40)	26
PTL-29-427-BL	.50 x 1.50 (12.70 x 38.10)	12	PTL-33-427-GY	1.50 x 4.0 (38.10 x 101.60)	16	PTPSL-26-422	2.75 X 1.25 (69.85 x 31.75)	26
PTL-29-427-BR	.50 x 1.50 (12.70 x 38.10)	12	PTL-33-427-OR	1.50 x 4.0 (38.10 x 101.60)	16	PTPSL-26-428	2.75 X 1.25 (69.85 x 31.75)	26
PTL-29-427-GN	.50 x 1.50 (12.70 x 38.10)	12	PTL-33-427-PL	1.50 x 4.0 (38.10 x 101.60)	16	PTPSL-26-483	2.75 X 1.25 (69.85 x 31.75)	26
PTL-29-427-OR	.50 x 1.50 (12.70 x 38.10)	12	PTL-33-427-RD	1.50 x 4.0 (38.10 x 101.60)	16	PTPSL-50-422	3.00 x 1.65 (76.20 x 41.91)	26
PTL-29-427-YL	.50 x 1.50 (12.70 x 38.10)	12	PTL-33-427-YL	1.50 x 4.0 (38.10 x 101.60)	16	PTPSL-50-428	3.00 x 1.65 (76.20 x 41.91)	26
PTL-29-427-PL	.50 x 1.50 (12.70 x 38.10)	12	PTL-34-400	1.50 x 6.0 (38.10 x 152.40)	16	PTPSL-50-483	3.00 x 1.65 (76.20 x 41.91)	26
PTL-29-427-RD	.50 x 1.50 (12.70 x 38.10)	12	PTL-34-427	1.50 x 6.0 (38.10 x 152.40)	16	PTS45-350-321	45 x .35 (11.43 x 8.89)	21
PTL-29-427-YL	.50 x 1.50 (12.70 x 38.10)	12	PTL-34-427-BL	1.50 x 6.0 (38.10 x 152.40)	16	PTS45-500-321	45 x .50 (11.43 x 12.7)	21
PTL-29-428	1.50 x .50 (38.10 x 12.70)	15	PTL-34-427-BR	1.50 x 6.0 (38.10 x 152.40)	16	PTS95-1000-321	.95 x 1.00 (24.13 x 25.4)	21
PTL-29-430	1.50 x .50 (38.10 x 12.70)	15	PTL-34-427-GN	1.50 x 6.0 (38.10 x 152.40)	16	PTS95-350-321	.95 x .35 (24.13 x 8.89)	21
PTL-29-437	1.50 x .50 (38.10 x 12.70)	15	PTL-34-427-GY	1.50 x 6.0 (38.10 x 152.40)	16	PTS95-500-321	.95 x .50 (24.13 x 12.70)	21
PTL-29-459	1.50 x .50 (38.10 x 12.70)	15	PTL-34-427-OR	1.50 x 6.0 (38.10 x 152.40)	16	PTS95-750-321	.95 x .75 (24.13 x 19.05)	21
PTL-29-483	1.50 x .50 (38.10 x 12.70)	15	PTL-34-427-PL	1.50 x 6.0 (38.10 x 152.40)	16	PTS190-1000-321	1.90 x 1.00 (48.26 x 25.40)	21
PTL-29-486	1.50 x .50 (38.10 x 12.70)	15	PTL-34-427-RD	1.50 x 6.0 (38.10 x 152.40)	16	PTS190-350-321	1.90 x .35 (48.26 x 8.89)	21
PTL-29-489	1.50 x .50 (38.10 x 12.70)	15	PTL-34-427-YL	1.50 x 6.0 (38.10 x 152.40)	16	PTS190-500-321	1.90 x .50 (48.26 x 12.70)	21
PTL-29-499	.50 x 1.50 (12.70 x 38.10)	12	PTL-35-422-PROP	1.63 x .75 (41.40 x 19.05)	26	PTS190-750-321	1.90 x .75 (48.26 x 19.05)	21
PTL-30-400	.75 x 1.50 (19.05 x 38.10)	13	PTL-35-423-PROP	1.63 x .75 (41.40 x 19.05)	26	PSPT-094-175W	1.765 x .182 (44.83 x 4.62)	20
PTL-30-422	1.50 x .75 (38.10 x 19.05)	15	PTL-35-428-PROP	1.63 x .75 (41.40 x 19.05)	26	PSPT-094-175Y	1.765 x .182 (44.83 x 4.62)	20
PTL-30-423-CALI	1.50 x .75 (38.10 x 19.05)	26	PTL-35-435-PROP	1.63 x .75 (41.40 x 19.05)	26	PSPT-094-1W	1.015 x .182 (25.78 x 4.62)	20
PTL-30-423-INSP	1.50 x .75 (38.10 x 19.05)	26	PTL-36-109	1.75 x 1.125 (44.45 x 28.57)	16	PSPT-094-1Y	1.015 x .182 (25.78 x 4.62)	20
PTL-30-423-TEST	1.50 x .75 (38.10 x 19.05)	26	PTL-37-351	3.00 x 1.90 (76.20 x 48.26)	17	PSPT-1000-175W	1.765 x 1.660 (44.83 x 42.16)	20
PTL-30-427	.75 x 1.50 (19.05 x 38.10)	13	PTL-37-422	3.00 x 1.90 (76.20 x 48.26)	17	PSPT-1000-175Y	1.765 x 1.660 (44.83 x 42.16)	20
PTL-30-427-BL	.75 x 1.50 (19.05 x 38.10)	13	PTL-37-423	3.00 x 1.90 (76.20 x 48.26)	17	PSPT-1000-1W	1.015 x 1.660 (25.78 x 42.16)	20
PTL-30-427-BR	.75 x 1.50 (19.05 x 38.10)	13	PTL-37-424	3.00 x 1.90 (76.20 x 48.26)	17	PSPT-1000-1Y	1.015 x 1.660 (25.78 x 42.16)	20
PTL-30-427-GN	.75 x 1.50 (19.05 x 38.10)	13	PTL-37-428	3.00 x 1.90 (76.20 x 48.26)	17	PSPT-125-175W	1.765 x .235 (44.83 x 5.96)	20
PTL-30-427-GY	.75 x 1.50 (19.05 x 38.10)	13	PTL-37-459	3.00 x 1.90 (76.20 x 48.26)	17	PSPT-125-175Y	1.765 x .235 (44.83 x 5.96)	20
PTL-30-427-OR	.75 x 1.50 (19.05 x 38.10)	13	PTL-37-483	3.00 x 1.90 (76.20 x 48.26)	17	PSPT-125-1W	1.015 x .235 (25.78 x 5.96)	20
PTL-30-427-PL	.75 x 1.50 (19.05 x 38.10)	13	PTL-37-486	3.00 x 1.90 (76.20 x 48.26)	17	PSPT-125-1Y	1.015 x .235 (25.78 x 5.96)	20
PTL-30-427-RD	.75 x 1.50 (19.05 x 38.10)	13	PTL-37-489	3.00 x 1.90 (76.20 x 48.26)	17	PSPT-187-175W	1.765 x .335 (44.83 x 8.50)	20
PTL-30-427-YL	.75 x 1.50 (19.05 x 38.10)	13	PTL-38-422	4.00 x 1.90 (101.60 x 48.26)	17	PSPT-187-175Y	1.765 x .335 (44.83 x 8.50)	20
PTL-30-428-CALI	1.50 x .75 (38.10 x 19.05)	26	PTL-38-423	4.00 x 1.90 (101.60 x 48.26)	17	PSPT-187-1W	1.015 x .335 (25.78 x 8.50)	20
PTL-30-428-INSP	1.50 x .75 (38.10 x 19.05)	26	PTL-38-424	4.00 x 1.90 (101.60 x 48.26)	17	PSPT-187-1Y	1.015 x .335 (25.78 x 8.50)	20
PTL-30-428-TEST	1.50 x .75 (38.10 x 19.05)	26	PTL-38-428	4.00 x 1.90 (101.60 x 48.26)	17	PSPT-250-175W	1.765 x .439 (44.83 x 11.15)	20
PTL-30-459	1.50 x .75 (38.10 x 19.05)	16	PTL-38-459	4.00 x 1.90 (101.60 x 48.26)	17	PSPT-250-175Y	1.765 x .439 (44.83 x 11.15)	20
PTL-30-483	1.50 x .75 (38.10 x 19.05)	16	PTL-38-483	4.00 x 1.90 (101.60 x 48.26)	17	PSPT-250-1W	1.015 x .439 (25.78 x 11.15)	20
PTL-30-486	1.50 x .75 (38.10 x 19.05)	16	PTL-38-486	4.00 x 1.90 (101.60 x 48.26)	17	PSPT-250-1Y	1.015 x .439 (25.78 x 11.15)	20
PTL-30-489	1.50 x .75 (38.10 x 19.05)	16	PTL-38-489	4.00 x 1.90 (101.60 x 48.26)	17	PSPT-375-175W	1.765 x .645 (44.83 x 16.38)	20
PTL-30-499	.75 x 1.50 (19.05 x 38.10)	13	PTL-39-422	.375 x .60 (9.53 x 15.24)	11	PSPT-375-175Y	1.765 x .645 (44.83 x 16.38)	20
PTL-31-351	1.50 x 1.00 (38.10 x 25.40)	16	PTL-40-412	1.938 x .375 (49.23 x 9.53)	16	PSPT-375-1W	1.015 x .645 (25.78 x 16.38)	20
PTL-31-400	1.00 x 1.50 (25.40 x 38.10)	14	PTL-42-422	1.00 (25.40) x continuous	15	PSPT-375-1Y	1.015 x .645 (25.78 x 16.38)	20
PTL-31-423	1.50 x 1.00 (38.10 x 25.40)	16	PTL-42-430	1.00 (25.40) x continuous	15	PSPT-500-175W	1.765 x .851 (44.83 x 21.61)	20
PTL-31-427	1.00 x 1.50 (25.40 x 38.10)	14	PTL-42-439	1.00 (25.40) x continuous	15	PSPT-500-175Y	1.765 x .851 (44.83 x 21.61)	20
PTL-31-427-BL	1.00 x 1.50 (25.40 x 38.10)	14	PTL-42-439OR	1.00 (25.40) x continuous	15	PSPT-500-1W	1.015 x .851 (25.78 x 21.61)	20
PTL-31-427-BR	1.00 x 1.50 (25.40 x 38.10)	14	PTL-42-439RD	1.00 (25.40) x continuous	15	PSPT-500-1Y	1.015 x .851 (25.78 x 21.61)	20

Label Index by Size



PORTABLE PRINTERS & LABELS

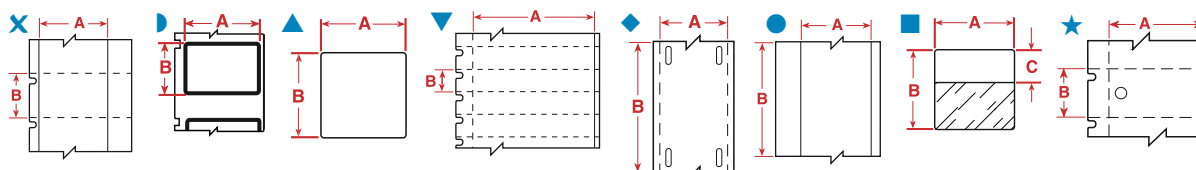

In. (mm) Diagram	Part Number	Pieces Per Package	Material	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Write-On Height C Inch (mm)	Maximum Characters Per Line For Font:			Maximum Lines Of Text For Font:		
								2	7	10	2	7	10
.24" Label Width													
●	PTLTB-400-240	30ft (9m)	Vinyl Cloth	White	0.24 (6.09)	continuous		4	2	1	—	N/A	—
●	BPTLTB-400-240	300ft (91m)	Vinyl Cloth	White	0.24 (6.09)	continuous		4	2	1	—	N/A	—
.25" Label Width													
▲	PTL-1-423	750	Polyester	White	0.25 (6.35)	0.25 (6.35)		5	2	0	2	1	0
▲	PTL-1-426	750	Polyimide	Amber	0.25 (6.35)	0.25 (6.35)		5	2	0	2	1	0
▲	PTL-1-457	750	Polyimide	White	0.25 (6.35)	0.25 (6.35)		5	2	0	2	1	0
▲	PTL-1-473	750	Polyester	White	0.25 (6.35)	0.25 (6.35)		5	2	0	2	1	0
▲	PTL-1-477	750	Polyimide	White	0.25 (6.35)	0.25 (6.35)		5	2	0	2	1	0
▲	PTL-10-400	750	Vinyl Cloth	White	0.25 (6.35)	0.75 (19.05)		5	2	1	8	4	2
■	PTL-10-427 *	750	Self-laminating Vinyl	Translucent	0.25 (6.35)	0.75 (19.05)	0.375 (9.53)	5	2	1	3	1	1
▲	PTL-28-400 **	750	Vinyl Cloth	White	0.25 (6.35)	1.50 (38.10)		5	2	1	16	8	5
■	PTL-28-427	750	Self-laminating Vinyl	Translucent	0.25 (6.35)	1.50 (38.10)	0.50 (12.70)	5	2	1	5	2	1
▲	PTL-28-499	750	Nylon Cloth	White	0.25 (6.35)	1.50 (38.10)		5	2	1	16	8	5
.318" Label Width													
●	PTLTB-400-318	30ft (9m)	Vinyl Cloth	White	0.318 (8.07)	continuous		7	3	2	—	N/A	—
●	BPTLTB-400-318	300ft (91m)	Vinyl Cloth	White	0.318 (8.07)	continuous		7	3	2	—	N/A	—
.375" Label Width													
▲	PTL-3-423	500	Polyester	White	0.375 (9.53)	0.375 (9.53)		8	3	2	3	1	1
▲	PTL-3-426	500	Polyimide	Amber	0.375 (9.53)	0.375 (9.53)		8	3	2	3	1	1
▲	PTL-3-457	500	Polyimide	White	0.375 (9.53)	0.375 (9.53)		8	3	2	3	1	1
▲	PTL-3-477	500	Polyimide	White	0.375 (9.53)	0.375 (9.53)		8	3	2	3	1	1
X	PTL-39-422	750	Polyester	White	0.375 (9.53)	0.60 (15.24)		8	3	2	6	3	2
X	PTL-39-430	750	Polyester	Clear	0.375 (9.53)	0.60 (15.24)		8	3	2	6	3	2
▲	PTL-16-400	500	Vinyl Cloth	White	0.375 (9.53)	1.00 (25.40)		8	3	2	10	5	3
▲	PTL-16-499	500	Nylon Cloth	White	0.375 (9.53)	1.00 (25.40)		8	3	2	10	5	3
●	PTL-46-422	50ft (15m)	Polyester	White	0.375 (9.53)	continuous		50	50	50	3	1	1
●	PTL-46-430	50ft (15m)	Polyester	Clear	0.375 (9.53)	continuous		50	50	50	3	1	1
●	PTLTB-400-375	30ft (9m)	Vinyl Cloth	White	0.375 (9.53)	continuous		8	3	2	—	N/A	—
●	BPTLTB-400-375	300ft (91m)	Vinyl Cloth	White	0.375 (9.53)	continuous		8	3	2	—	N/A	—
.40" Label Width													
▲	PTL-4-423	500	Polyester	White	0.40 (10.16)	0.40 (10.16)		9	3	2	4	2	1
▲	PTL-4-426	500	Polyimide	Amber	0.40 (10.16)	0.40 (10.16)		9	3	2	4	2	1
▲	PTL-4-457	500	Polyimide	White	0.40 (10.16)	0.40 (10.16)		9	3	2	4	2	1

Any label two inches or larger is rotated on liner.

Note: Labels in chart are sorted in order by width, height, 3 digit material number (within part number), then die number (within part number).

* Also available in: YL=Yellow

**Also available in: OR=orange, GN=green, GY=grey, PL=purple, BL=blue, BR=brown, YL=yellow, RD=red.


To order a color, add a dash "-" after the material number, then add the color suffix.

Standard product: Contact your Brady Identification Solutions distributor or Customer Service representative for ordering information.

TLS2200 / TLS PC LINK LABEL INDEX BY SIZE

Label Index by Size

CONTINUED

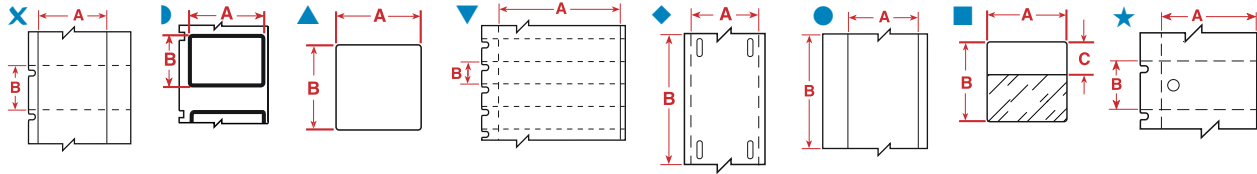

In. (mm)	Diagram	Part Number	Pieces Per Package	Material	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Write-On Height C Inch (mm)	Maximum Characters Per Line For Font:			Maximum Lines Of Text For Font:		
									2	7	10	2	7	10
.50" Label Width														
▲		PTL-5-422	750	Polyester	White	0.50 (12.70)	0.20 (5.08)		11	0	0	1	0	0
▲		PTL-5-423	750	Polyester	White	0.50 (12.70)	0.20 (5.08)		11	0	0	1	0	0
▲		PTL-5-473	750	Polyester	White	0.50 (12.70)	0.20 (5.08)		11	0	0	1	0	0
▲		PTL-6-423	750	Polyester	White	0.50 (12.70)	0.275 (6.98)		11	5	0	2	1	0
▲		PTL-6-426	750	Polyimide	Amber	0.50 (12.70)	0.275 (6.98)		11	5	0	2	1	0
▲		PTL-6-430	750	Polyester	Clear	0.50 (12.70)	0.275 (6.98)		11	5	0	2	1	0
▲		PTL-6-457	750	Polyimide	White	0.50 (12.70)	0.275 (6.98)		11	5	0	2	1	0
▲		PTL-6-473	750	Polyester	White	0.50 (12.70)	0.275 (6.98)		11	5	0	2	1	0
▲		PTL-44-422	500	Polyester	White	0.50 (12.70)	0.375 (9.52)		11	5	3	3	1	1
▲		PTL-44-430	500	Polyester	Clear	0.50 (12.70)	0.375 (9.52)		11	5	3	3	1	1
▲		PTL-7-400	500	Vinyl Cloth	White	0.50 (12.70)	0.50 (12.70)		11	5	3	5	2	1
▲		PTL-7-422	500	Polyester	White	0.50 (12.70)	0.50 (12.70)		11	5	3	5	2	1
▲		PTL-7-423	500	Polyester	White	0.50 (12.70)	0.50 (12.70)		11	5	3	5	2	1
▲		PTL-7-430	500	Polyester	Clear	0.50 (12.70)	0.50 (12.70)		11	5	3	5	2	1
▲		PTL-7-499	500	Nylon Cloth	White	0.50 (12.70)	0.50 (12.70)		11	5	3	5	2	1
▲		PTL-11-400	500	Vinyl Cloth	White	0.50 (12.70)	0.75 (19.05)		11	5	3	8	4	2
▲		BPTL-11-400	5000	Vinyl Cloth	White	0.50 (12.70)	0.75 (19.05)		11	5	3	8	4	2
■		PTL-11-427 *	500	Self-laminating Vinyl	Translucent	0.50 (12.70)	0.75 (19.05)	0.375 (9.53)	11	5	3	3	1	1
■		BPTL-11-427	5000	Self-laminating Vinyl	Translucent	0.50 (12.70)	0.75 (19.05)	0.375 (9.53)	11	5	3	3	1	1
▲		PTL-11-499	500	Nylon Cloth	White	0.50 (12.70)	0.75 (19.05)		11	5	3	8	4	2
▲		BPTL-11-499	5000	Nylon Cloth	White	0.50 (12.70)	0.75 (19.05)		11	5	3	8	4	2
■		PTL-17-427 *	500	Self-laminating Vinyl	Translucent	0.50 (12.70)	1.00 (25.40)	0.375 (9.53)	11	5	3	3	1	1
■		BPTL-17-427	5000	Self-laminating Vinyl	Translucent	0.50 (12.70)	1.00 (25.40)	0.375 (9.53)	11	5	3	3	1	1
▲		PTL-29-400	500	Vinyl Cloth	White	0.50 (12.70)	1.50 (38.10)		11	5	3	16	8	5
▲		BPTL-29-400	5000	Vinyl Cloth	White	0.50 (12.70)	1.50 (38.10)		11	5	3	16	8	5
■		PTL-29-427 **	500	Self-laminating Vinyl	Translucent	0.50 (12.70)	1.50 (38.10)	0.50 (12.70)	11	5	3	5	2	1
■		BPTL-29-427	5000	Self-laminating Vinyl	Translucent	0.50 (12.70)	1.50 (38.10)	0.50 (12.70)	11	5	3	5	2	1
▲		PTL-29-499	500	Nylon Cloth	White	0.50 (12.70)	1.50 (38.10)		11	5	3	16	8	5
●		PTL-8-400	50ft (15m)	Vinyl Cloth	White	0.50 (12.70)	continuous		50	50	50	5	2	1
●		PTL-8-422	50ft (15m)	Polyester	White	0.50 (12.70)	continuous		50	50	50	5	2	1
●		PTL-8-423	50ft (15m)	Polyester	White	0.50 (12.70)	continuous		50	50	50	5	2	1
●		PTL-8-428	50ft (15m)	Metallized Polyester	Silver	0.50 (12.70)	continuous		50	50	50	5	2	1
●		PTL-8-430	50ft (15m)	Polyester	Clear	0.50 (12.70)	continuous		50	50	50	5	2	1
●		PTL-8-439	50ft (15m)	Vinyl	White	0.50 (12.70)	continuous		50	50	50	5	2	1
●		PTL-8-439OR	50ft (15m)	Vinyl	Orange	0.50 (12.70)	continuous		50	50	50	5	2	1
●		PTL-8-439YL	50ft (15m)	Vinyl	Yellow	0.50 (12.70)	continuous		50	50	50	5	2	1
●		PTL-8-439-RD	50ft (15m)	Vinyl	Red	0.50 (12.70)	continuous		50	50	50	5	2	1

Any label two inches or larger is rotated on liner.

Note: Labels in chart are sorted in order by width, height, 3 digit material number (within part number), then die number (within part number).


* Also available in: YL=Yellow

**Also available in: OR=orange, GN=green, GY=grey, PL=purple, BL=blue, BR=brown, YL=yellow, RD=red.

To order a color, add a dash "-" after the material number, then add the color suffix.
Standard product: Contact your Brady Identification Solutions distributor or Customer Service representative for ordering information.

Label Index by Size

CONTINUED

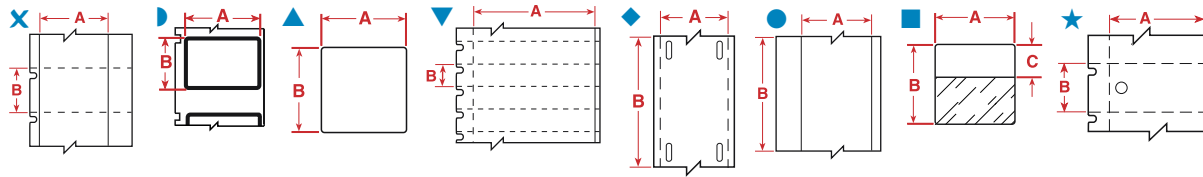

In. (mm) Diagram	Part Number	Pieces Per Package	Material	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Write-On Height C Inch (mm)	Maximum Characters Per Line For Font:			Maximum Lines Of Text For Font:		
								2	7	10	2	7	10
.65" Label Width													
▲	PTL-9-423	750	Polyester	White	0.65 (16.51)	0.20 (5.08)		15	0	0	1	0	0
▲	PTL-9-426	750	Polyimide	Amber	0.65 (16.51)	0.20 (5.08)		15	0	0	1	0	0
▲	PTL-9-437	750	Tedlar®	White	0.65 (16.51)	0.20 (5.08)		15	0	0	1	0	0
▲	PTL-9-457	750	Polyimide	White	0.65 (16.51)	0.20 (5.08)		15	0	0	1	0	0
▲	PTL-9-473	750	Polyester	White	0.65 (16.51)	0.20 (5.08)		15	0	0	1	0	0
▲	PTL-9-477	750	Polyimide	White	0.65 (16.51)	0.20 (5.08)		15	0	0	1	0	0
.75" Label Width													
▲	PTL-10-423	750	Polyester	White	0.75 (19.05)	0.25 (6.35)		18	7	0	2	1	0
▲	PTL-10-426	750	Polyimide	Amber	0.75 (19.05)	0.25 (6.35)		18	7	0	2	1	0
▲	PTL-10-437	750	Tedlar	White	0.75 (19.05)	0.25 (6.35)		18	7	0	2	1	0
▲	PTL-10-457	750	Polyimide	White	0.75 (19.05)	0.25 (6.35)		18	7	0	2	1	0
▲	PTL-10-473	750	Polyester	White	0.75 (19.05)	0.25 (6.35)		18	7	0	2	1	0
▲	PTL-10-477	750	Polyimide	White	0.75 (19.05)	0.25 (6.35)		18	7	0	2	1	0
▲	PTL-18-400	250	Vinyl Cloth	White	0.75 (19.05)	1.00 (25.40)		18	7	5	10	5	3
▲	BPTL-18-400	2500	Vinyl Cloth	White	0.75 (19.05)	1.00 (25.40)		18	7	5	10	5	3
■	PTL-18-427 *	250	Self-laminating Vinyl	Translucent	0.75 (19.05)	1.00 (25.40)	0.375 (9.53)	18	7	5	3	1	1
■	BPTL-18-427	2500	Self-laminating Vinyl	Translucent	0.75 (19.05)	1.00 (25.40)	0.375 (9.53)	18	7	5	3	1	1
▲	PTL-18-499	250	Nylon Cloth	White	0.75 (19.05)	1.00 (25.40)		18	7	5	10	5	3
▲	PTL-30-400	250	Vinyl Cloth	White	0.75 (19.05)	1.50 (38.10)		18	7	5	16	8	5
■	PTL-30-427 **	250	Self-laminating Vinyl	Translucent	0.75 (19.05)	1.50 (38.10)	0.50 (12.70)	18	7	5	5	2	1
■	BPTL-30-427	2500	Self-laminating Vinyl	Translucent	0.75 (19.05)	1.50 (38.10)	0.50 (12.70)	18	7	5	5	2	1
▲	PTL-30-499	250	Nylon Cloth	White	0.75 (19.05)	1.50 (38.10)		18	7	5	16	8	5
◆	PTL-12-109	100	Polyethylene	White	0.75 (19.05)	3.00 (76.20)		45	19	12	6	3	2
◆	PTL-12-109	1000	Polyethylene	White	0.75 (19.05)	3.00 (76.20)		45	19	12	6	3	2
.90" Label Width													
▲	PTL-13-423	750	Polyester	White	0.90 (22.86)	0.25 (6.35)		22	9	0	2	1	0
▲	PTL-13-426	750	Polyimide	Amber	0.90 (22.86)	0.25 (6.35)		22	9	0	2	1	0
▲	PTL-13-457	750	Polyimide	White	0.90 (22.86)	0.25 (6.35)		22	9	0	2	1	0
1.00" Label Width													
▲	PTL-14-423	750	Polyester	White	1.00 (25.40)	0.187 (4.74)		24	0	0	1	0	0
▲	PTL-14-457	750	Polyimide	White	1.00 (25.40)	0.187 (4.74)		24	0	0	1	0	0
▲	PTL-14-477	750	Polyimide	White	1.00 (25.40)	0.187 (4.74)		24	0	0	1	0	0
▲	PTL-15-400	750	Vinyl Cloth	White	1.00 (25.40)	0.275 (6.98)		24	10	0	2	1	0
▲	PTL-15-423	750	Polyester	White	1.00 (25.40)	0.275 (6.98)		24	10	0	2	1	0
▲	PTL-15-428	750	Metallized Polyester	Silver	1.00 (25.40)	0.275 (6.98)		24	10	0	2	1	0
▲	PTL-15-437	750	Tedlar	White	1.00 (25.40)	0.275 (6.98)		24	10	0	2	1	0
▲	PTL-16-422	500	Polyester	White	1.00 (25.40)	0.375 (9.53)		24	10	7	3	1	1
▲	PTL-16-423	500	Polyester	White	1.00 (25.40)	0.375 (9.53)		24	10	7	3	1	1
▲	BPTL-16-423	5000	Polyester	White	1.00 (25.40)	0.375 (9.53)		24	10	7	3	1	1
▲	PTL-16-426	500	Polyimide	Amber	1.00 (25.40)	0.375 (9.53)		24	10	7	3	1	1

Tedlar® is a registered trademark of DuPont.

Any label two inches or larger is rotated on liner.

Note: Labels in chart are sorted in order by width, height, 3 digit material number (within part number), then die number (within part number).


* Also available in: YL=Yellow

** Also available in: OR=orange, GN=green, GY=grey, PL=purple, BL=blue, BR=brown, YL=yellow, RD=red. To order a color, add a dash "-" after the material number, then add the color suffix.

Standard product: Contact your Brady Identification Solutions distributor or Customer Service representative for ordering information.

Label Index by Size

CONTINUED

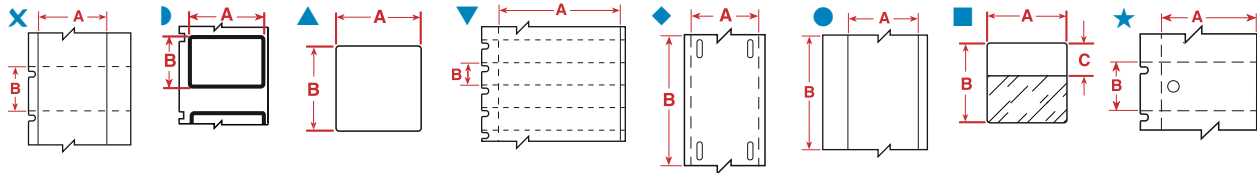

In. (mm)	Diagram	Part Number	Pieces Per Package	Material	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Write-On Height C Inch (mm)	Maximum Characters Per Line For Font:			Maximum Lines Of Text For Font:		
									2	7	10	2	7	10
1.00" Label Width (continued)														
▲		PTL-16-430	500	Polyester	Clear	1.00 (25.40)	0.375 (9.53)		24	10	7	3	1	1
▲		PTL-16-457	500	Polyimide	White	1.00 (25.40)	0.375 (9.53)		24	10	7	3	1	1
▲		PTL-16-473	500	Polyester	White	1.00 (25.40)	0.375 (9.53)		24	10	7	3	1	1
▲		PTL-16-483	500	Polyester	White	1.00 (25.40)	0.375 (9.53)		24	10	7	3	1	1
▲		PTL-16-486	500	Polyester	Silver	1.00 (25.40)	0.375 (9.53)		24	10	7	3	1	1
▲		PTL-17-351	500	Vinyl	White	1.00 (25.40)	0.50 (12.70)		24	10	7	5	2	1
▲		PTL-17-400	500	Vinyl Cloth	White	1.00 (25.40)	0.50 (12.70)		24	10	7	5	2	1
▲		PTL-17-422	500	Polyester	White	1.00 (25.40)	0.50 (12.70)		24	10	7	5	2	1
▲		PTL-17-423	500	Polyester	White	1.00 (25.40)	0.50 (12.70)		24	10	7	5	2	1
▲		BPTL-17-423	5000	Polyester	White	1.00 (25.40)	0.50 (12.70)		24	10	7	5	2	1
▲		PTL-17-426	500	Polyimide	Amber	1.00 (25.40)	0.50 (12.70)		24	10	7	5	2	1
▲		PTL-17-428	500	Metallized Polyester	Silver	1.00 (25.40)	0.50 (12.70)		24	10	7	5	2	1
▲		BPTL-17-428	5000	Metallized Polyester	Silver	1.00 (25.40)	0.50 (12.70)		24	10	7	5	2	1
▲		PTL-17-430	500	Polyester	Clear	1.00 (25.40)	0.50 (12.70)		24	10	7	5	2	1
▲		PTL-17-473	500	Polyester	White	1.00 (25.40)	0.50 (12.70)		24	10	7	5	2	1
▲		PTL-17-483	500	Polyester	White	1.00 (25.40)	0.50 (12.70)		24	10	7	5	2	1
▲		PTL-17-486	500	Polyester	Silver	1.00 (25.40)	0.50 (12.70)		24	10	7	5	2	1
▲		PTL-17-489	500	Polyester	White	1.00 (25.40)	0.50 (12.70)		24	10	7	5	2	1
▲		PTL-19-400	250	Vinyl Cloth	White	1.00 (25.40)	1.00 (25.40)		24	10	7	10	5	3
▲		BPTL-19-400	2500	Vinyl Cloth	White	1.00 (25.40)	1.00 (25.40)		24	10	7	10	5	3
▲		PTL-19-422	250	Polyester	White	1.00 (25.40)	1.00 (25.40)		24	10	7	10	5	3
▲		PTL-19-423	250	Polyester	White	1.00 (25.40)	1.00 (25.40)		24	10	7	10	5	3
▲		BPTL-19-423	2500	Polyester	White	1.00 (25.40)	1.00 (25.40)		24	10	7	10	5	3
■		PTL-19-427 **	250	Self-laminating Vinyl	Translucent	1.00 (25.40)	1.00 (25.40)	.375 (9.53)	24	10	7	3	1	1
■		BPTL-19-427	2500	Self-laminating Vinyl	Translucent	1.00 (25.40)	1.00 (25.40)	.375 (9.53)	24	10	7	3	1	1
▲		PTL-19-483	250	Polyester	White	1.00 (25.40)	1.00 (25.40)		24	10	7	10	5	3
▲		PTL-19-486	250	Polyester	Silver	1.00 (25.40)	1.00 (25.40)		24	10	7	10	5	3
▲		PTL-19-489	250	Polyester	White	1.00 (25.40)	1.00 (25.40)		24	10	7	10	5	3
▲		PTL-19-499	250	Nylon Cloth	White	1.00 (25.40)	1.00 (25.40)		24	10	7	10	5	3
■		PTL-19-642	250	Tedlar®	White	1.00 (25.40)	1.00 (25.40)	.375 (9.53)	24	10	7	3	1	1
▲		PTL-31-400	250	Vinyl Cloth	White	1.00 (25.40)	1.50 (38.10)		24	10	7	16	8	5
■		PTL-31-427	250	Self-laminating Vinyl	Translucent	1.00 (25.40)	1.50 (38.10)	0.50 (12.70)	24	10	7	5	2	1
■		BPTL-31-427	2500	Self-laminating Vinyl	Translucent	1.00 (25.40)	1.50 (38.10)	0.50 (12.70)	24	10	7	5	2	1
▲		PTL-31-499	250	Nylon Cloth	White	1.00 (25.40)	1.50 (38.10)		24	10	7	16	8	5
■		PTL-31-642	250	Tedlar	White	1.00 (25.40)	1.50 (38.10)	0.50 (12.70)	24	10	7	5	2	1
▲		PTL-21-400	100	Vinyl Cloth	White	1.00 (25.40)	2.50 (63.50)		24	10	7	23	14	9
■		PTL-21-427	100	Self-laminating Vinyl	Translucent	1.00 (25.40)	2.50 (63.50)	0.75 (19.05)	24	10	7	8	4	2
■		BPTL-21-427	1000	Self-laminating Vinyl	Translucent	1.00 (25.40)	2.50 (63.50)	0.75 (19.05)	24	10	7	8	4	2
▲		PTL-21-499	100	Nylon Cloth	Matte White	1.00 (25.40)	2.50 (63.50)	0.75 (19.05)	24	10	7	8	4	2
■		PTL-21-642	100	Tedlar	White	1.00 (25.40)	2.50 (63.50)	0.75 (19.05)	24	10	7	8	4	2

Tedlar® is a registered trademark of DuPont.

Any label two inches or larger is rotated on liner.

Note: Labels in chart are sorted in order by width, height, 3 digit material number (within part number), then die number (within part number).


* Also available in: YL=Yellow

**Also available in: OR=orange, GN=green, GY=grey, PL=purple, BL=blue, BR=brown, YL=yellow, RD=red.
To order a color, add a dash "-" after the material number, then add the color suffix.

Standard product: Contact your Brady Identification Solutions distributor or Customer Service representative for ordering information.

Label Index by Size

CONTINUED

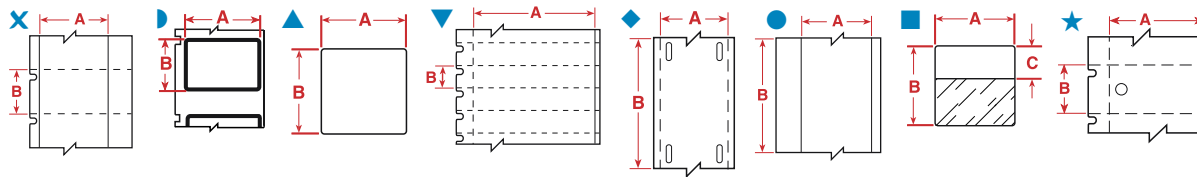

In. (mm) Diagram	Part Number	Pieces Per Package	Material	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Write-On Height C Inch (mm)	Maximum Characters Per Line For Font:			Maximum Lines Of Text For Font:		
								2	7	10	2	7	10
1.00" Label Width (continued)													
▲	PTL-23-400	100	Vinyl Cloth	White	1.00 (25.40)	4.00 (101.60)		24	10	7	23	22	15
■	PTL-23-427 **	100	Self-laminating Vinyl	Translucent	1.00 (25.40)	4.00 (101.60)	1.00 (25.40)	24	10	7	10	5	3
■	BPTL-23-427	1000	Self-laminating Vinyl	Translucent	1.00 (25.40)	4.00 (101.60)	1.00 (25.40)	24	10	7	10	5	3
●	PTL-42-422	50ft (15m)	Polyester	White	1.00 (25.40)	continuous		50	50	50	5	4	3
●	PTL-42-430	50ft (15m)	Polyester	Clear	1.00 (25.40)	continuous		50	50	50	5	4	3
●	PTL-42-439	50ft (15m)	Vinyl	White	1.00 (25.40)	continuous		50	50	50	5	3	2
●	PTL-42-439OR	50ft (15m)	Vinyl	Orange	1.00 (25.40)	continuous		50	50	50	5	3	2
●	PTL-42-439RD	50ft (15m)	Vinyl	Red	1.00 (25.40)	continuous		50	50	50	5	3	2
●	PTL-42-439YL	50ft (15m)	Vinyl	Yellow	1.00 (25.40)	continuous		50	50	50	5	3	2
●	PTL-42-483	50ft (15m)	Polyester	White	1.00 (25.40)	continuous		50	50	50	5	3	2
1.13" Label Width													
▶	PTL-24-423BK	500	Polyester	White	1.13 (28.70)	0.50 (12.70)		24	10	7	3	1	1
▶	PTL-24-428BK	500	Metallized Polyester	Silver	1.13 (28.70)	0.50 (12.70)		24	10	7	3	1	1
▲	PTL-24-483	500	Polyester	White	1.13 (28.70)	0.50 (12.70)		24	10	7	3	1	1
▲	PTL-24-486	500	Polyester	Silver	1.13 (28.70)	0.50 (12.70)		24	10	7	3	1	1
1.25" Label Width													
▲	PTL-25-423	750	Polyester	White	1.25 (31.75)	0.25 (6.35)		31	13	0	2	1	0
▲	PTL-25-426	750	Polyimide	Amber	1.25 (31.75)	0.25 (6.35)		31	13	0	2	1	0
▲	PTL-25-457	750	Polyimide	White	1.25 (31.75)	0.25 (6.35)		31	13	0	2	1	0
▲	PTL-25-477	750	Polyimide	White	1.25 (31.75)	0.25 (6.35)		31	13	0	2	1	0
1.50" Label Width													
▲	PTL-27-423	750	Polyester	White	1.50 (38.10)	0.125 (3.18)		37	0	0	1	0	0
▲	PTL-27-426	750	Polyimide	Amber	1.50 (38.10)	0.125 (3.18)		37	0	0	1	0	0
▲	PTL-27-457	750	Polyimide	White	1.50 (38.10)	0.125 (3.18)		37	0	0	1	0	0
▲	PTL-27-477	750	Polyimide	White	1.50 (38.10)	0.125 (3.18)		37	0	0	1	0	0
▲	PTL-28-423	750	Polyester	White	1.50 (38.10)	0.25 (6.35)		37	15	0	2	1	0
▲	PTL-28-426	750	Polyimide	Amber	1.50 (38.10)	0.25 (6.35)		37	15	0	2	1	0
▲	PTL-28-430	750	Polyester	Clear	1.50 (38.10)	0.25 (6.35)		37	15	0	2	1	0
▲	PTL-28-457	750	Polyimide	White	1.50 (38.10)	0.25 (6.35)		37	15	0	2	1	0
▲	PTL-28-473	750	Polyester	White	1.50 (38.10)	0.25 (6.35)		37	15	0	2	1	0
▲	PTL-28-477	750	Polyimide	White	1.50 (38.10)	0.25 (6.35)		37	15	0	2	1	0
▲	PTL-45-422	500	Polyester	White	1.50 (38.10)	0.375 (9.525)		37	15	10	3	1	1
▲	PTL-45-430	500	Polyester	Clear	1.50 (38.10)	0.375 (9.525)		37	15	10	3	1	1
▲	PTL-29-486	500	Polyester	Silver	1.50 (38.10)	0.50 (12.70)		37	15	10	5	2	1
▲	PTL-29-489	500	Polyester	White	1.50 (38.10)	0.50 (12.70)		37	15	10	5	2	1
▲	PTL-29-422	500	Polyester	White	1.50 (38.10)	0.50 (12.70)		37	15	10	5	2	1
▲	PTL-29-423	500	Polyester	White	1.50 (38.10)	0.50 (12.70)		37	15	10	5	2	1
▲	BPTL-29-423	5000	Polyester	White	1.50 (38.10)	0.50 (12.70)		37	15	10	5	2	1
▲	PTL-29-428	500	Metallized	Silver	1.50 (38.10)	0.50 (12.70)		37	15	10	5	2	1
▲	PTL-29-430	500	Clear	Gloss	1.50 (38.10)	0.50 (12.70)		37	15	10	5	2	1
▲	PTL-29-437	500	Tedlar®	White	1.50 (38.10)	0.50 (12.70)		37	15	10	5	2	1
▲	PTL-29-459	500	Polyester	White	1.50 (38.10)	0.50 (12.70)		37	15	10	5	2	1
▲	PTL-29-483	500	Polyester	White	1.50 (38.10)	0.50 (12.70)		37	15	10	5	2	1
▲	PTL-30-422	250	Polyester	White	1.50 (38.10)	0.75 (19.05)		37	15	10	8	4	2

Tedlar® is a registered trademark of DuPont.

Any label two inches or larger is rotated on liner.

Note: Labels in chart are sorted in order by width, height, 3 digit material number (within part number), then die number (within part number).


* Also available in: YL=Yellow

**Also available in: OR=orange, GN=green, GY=grey, PL=purple, BL=blue, BR=brown, YL=yellow, RD=red. To order a color, add a dash "-" after the material number, then add the color suffix.

Standard product: Contact your Brady Identification Solutions distributor or Customer Service representative for ordering information.

Label Index by Size

CONTINUED

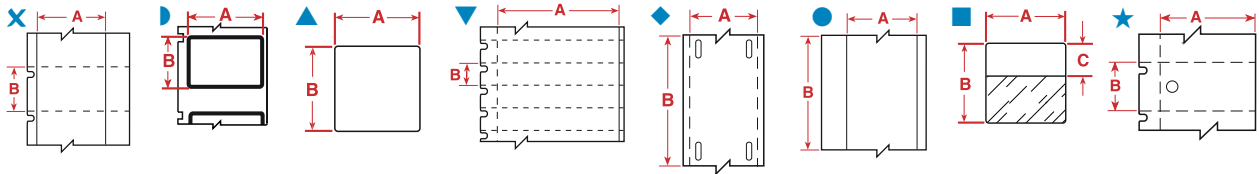

In. (mm)	Diagram	Part Number	Pieces Per Package	Material	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Write-On Height C Inch (mm)	Maximum Characters Per Line For Font:			Maximum Lines Of Text For Font:		
									2	7	10	2	7	10
1.50" Label Width (continued)														
	▲	PTL-30-459	250	Polyester	White	1.50 (38.10)	0.75 (19.05)		37	15	10	8	4	2
	▲	PTL-30-483	250	Polyester	White	1.50 (38.10)	0.75 (19.05)		37	15	10	8	4	2
	▲	PTL-30-486	250	Polyester	Silver	1.50 (38.10)	0.75 (19.05)		37	15	10	8	4	2
	▲	PTL-31-351	250	Vinyl	White	1.50 (38.10)	1.00 (25.40)		37	15	10	10	5	3
	▲	PTL-31-423	250	Polyester	White	1.50 (38.10)	1.00 (25.40)		37	15	10	10	5	3
	▲	PTL-31-483	250	Polyester	White	1.50 (38.10)	1.00 (25.40)		37	15	10	10	5	3
	▲	PTL-31-486	250	Polyester	Silver	1.50 (38.10)	1.00 (25.40)		37	15	10	10	5	3
	▲	PTL-31-489	250	Polyester	White	1.50 (38.10)	1.00 (25.40)		37	15	10	10	5	3
	▲	PTL-32-400	250	Vinyl Cloth	White	1.50 (38.10)	1.50 (38.10)		37	15	10	16	8	5
	▲	PTL-32-422	250	Polyester	White	1.50 (38.10)	1.50 (38.10)		37	15	10	16	8	5
	▲	PTL-32-423	250	Polyester	White	1.50 (38.10)	1.50 (38.10)		37	15	10	16	8	5
	■	PTL-32-427 **	250	Self-laminating Vinyl	Translucent	1.50 (38.10)	1.50 (38.10)	0.50 (12.70)	37	15	10	5	2	1
	■	BPTL-32-427	2500	Self-laminating Vinyl	Translucent	1.50 (38.10)	1.50 (38.10)	0.50 (12.70)	37	15	10	5	2	1
	▲	PTL-32-483	250	Polyester	White	1.50 (38.10)	1.50 (38.10)		37	15	10	16	8	5
	▲	PTL-32-486	250	Polyester	Silver	1.50 (38.10)	1.50 (38.10)		37	15	10	16	8	5
	▲	PTL-32-489	250	Polyester	White	1.50 (38.10)	1.50 (38.10)		37	15	10	16	8	5
	▲	PTL-33-400	100	Vinyl Cloth	White	1.50 (38.10)	4.00 (101.60)		37	15	10	16	8	2
	■	PTL-33-427	100	Self-laminating Vinyl	Translucent	1.50 (38.10)	4.00 (101.60)	1.00 (25.40)	37	15	10	10	5	3
	■	BPTL-33-427 **	500	Self-laminating Vinyl	Translucent	1.50 (38.10)	4.00 (101.60)	1.00 (25.40)	37	15	10	10	5	3
	▲	PTL-34-400	50	Vinyl Cloth	White	1.50 (38.10)	6.00 (152.40)		37	15	10	22	22	21
	■	PTL-34-427 **	50	Self-laminating Vinyl	Translucent	1.50 (38.10)	6.00 (152.40)	1.50 (38.10)	37	15	10	16	8	5
	■	BPTL-34-427	500	Self-laminating Vinyl	Translucent	1.50 (38.10)	6.00 (152.40)	1.50 (38.10)	37	15	10	16	8	5
	●	PTLCM-41-437W	50ft.	Tedlar®	White	1.50 (38.10)	continuous		50	50	50	14	7	4
	●	PTLCM-41-437Y	50ft.	Tedlar	Yellow	1.50 (38.10)	continuous		50	50	50	14	7	4
1.75" Label Width														
	★	PTL-36-109	250	Polyethylene	White	1.75 (44.45)	1.125 (28.57)		27	11	7	15	7	5
1.90" Label Width														
	●	PTL-43-422	50ft (15m)	Polyester	White	1.90 (48.26)	continuous		50	50	50	10	6	4
	●	PTL-43-430	50ft (15m)	Polyester	Clear	1.90 (48.26)	continuous		50	50	50	10	6	4
	●	PTL-43-439	50ft (15m)	Vinyl	White	1.90 (48.26)	continuous		50	50	50	10	6	4
	●	PTL-43-439OR	50ft (15m)	Vinyl	Orange	1.90 (48.26)	continuous		50	50	50	10	6	4
	●	PTL-43-439RD	50ft (15m)	Vinyl	Red	1.90 (48.26)	continuous		50	50	50	10	6	4
	●	PTL-43-439YL	50ft (15m)	Vinyl	Yellow	1.90 (48.26)	continuous		50	50	50	10	6	4
	●	PTL-43-483	50ft (15m)	Polyester	White	1.90 (48.26)	continuous		50	50	50	10	6	4
1.938" Label Width														
	▼	PTL-40-412	750	Polypropylene	White	1.938 (49.23)	0.375 (9.53)		40	17	11	3	1	1
	▼	BPTL-40-412	5000	Polypropylene	White	1.938 (49.23)	0.375 (9.53)		40	17	11	3	1	1

Tedlar® is a registered trademark of DuPont.

Any label two inches or larger is rotated on liner.

Note: Labels in chart are sorted in order by width, height, 3 digit material number (within part number), then die number (within part number).


* Also available in: YL=Yellow

**Also available in: OR=orange, GN=green, GY=grey, PL=purple, BL=blue, BR=brown, YL=yellow, RD=red. To order a color, add a dash "-" after the material number, then add the color suffix.

Standard product: Contact your Brady Identification Solutions distributor or Customer Service representative for ordering information.

Label Index by Size

CONTINUED

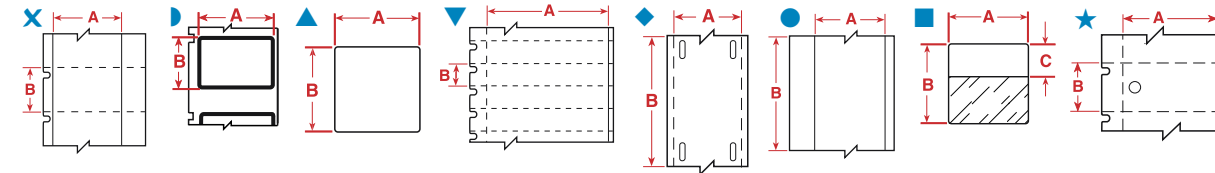

In. (mm)	Diagram	Part Number	Pieces Per Package	Material	Color	Label Width	Label Height	Write-On Height C	Maximum Characters Per Line For Font:			Maximum Lines Of Text For Font:		
						A Inch (mm)	B Inch (mm)		2	7	10	2	7	10
2.00" Label Width														
▲		PTL-2-423	100	Polyester	White	2.00 (50.80)	0.25 (6.35)		46	19	0	2	1	0
▲		PTL-2-426	100	Polyimide	Amber	2.00 (50.80)	0.25 (6.35)		46	19	0	2	1	0
▲		PTL-2-457	100	Polyimide	White	2.00 (50.80)	0.25 (6.35)		46	19	0	2	1	0
▲		PTL-2-477	100	Polyimide	White	2.00 (50.80)	0.25 (6.35)		46	19	0	2	1	0
▲		PTL-20-351	100	Vinyl	White	2.00 (50.80)	1.00 (25.40)		46	19	13	10	5	3
▲		PTL-20-422	100	Polyester	White	2.00 (50.80)	1.00 (25.40)		46	19	13	10	5	3
▲		BPTL-20-422	1000	Polyester	White	2.00 (50.80)	1.00 (25.40)		46	19	13	10	5	3
▲		PTL-20-423	100	Polyester	White	2.00 (50.80)	1.00 (25.40)		46	19	13	10	5	3
▲		BPTL-20-423	1000	Polyester	White	2.00 (50.80)	1.00 (25.40)		46	19	13	10	5	3
▲		PTL-20-424	100	Paper	White	2.00 (50.80)	1.00 (25.40)		46	19	13	10	5	3
▲		BPTL-20-424	1000	Paper	White	2.00 (50.80)	1.00 (25.40)		46	19	13	10	5	3
▲		PTL-20-428	100	Metallized Polyester	Silver	2.00 (50.80)	1.00 (25.40)		46	19	13	10	5	3
▲		BPTL-20-428	1000	Metallized Polyester	Silver	2.00 (50.80)	1.00 (25.40)		46	19	13	10	5	3
▲		PTL-20-459	100	Polyester	White	2.00 (50.80)	1.00 (25.40)		46	19	13	10	5	3
▲		PTL-20-483	100	Polyester	White	2.00 (50.80)	1.00 (25.40)		46	19	13	10	5	3
▲		PTL-20-486	100	Polyester	Silver	2.00 (50.80)	1.00 (25.40)		46	19	13	10	5	3
▲		PTL-20-489	100	Polyester	White	2.00 (50.80)	1.00 (25.40)		46	19	13	10	5	3
2.75" Label Width														
▲		PTL-26-423	100	Polyester	White	2.75 (69.85)	1.25 (31.75)		50	29	19	13	6	4
▲		PTL-26-428	100	Polyester	Silver	2.75 (69.85)	1.25 (31.75)		50	29	19	13	6	4
▲		PTL-26-459	100	Polyester	White	2.75 (69.85)	1.25 (31.75)		50	29	19	13	6	4
3.00" Label Width														
▲		PTL-22-422	100	Polyester	White	3.00 (76.20)	1.00 (25.40)		50	31	21	10	5	3
▲		PTL-22-423	100	Polyester	White	3.00 (76.20)	1.00 (25.40)		50	31	21	10	5	3
▲		PTL-22-424	100	Paper	White	3.00 (76.20)	1.00 (25.40)		50	31	21	10	5	3
▲		PTL-22-428	100	Polyester	Silver	3.00 (76.20)	1.00 (25.40)		50	31	21	10	5	3
▲		PTL-22-459	100	Polyester	White	3.00 (76.20)	1.00 (25.40)		50	31	21	10	5	3
▲		PTL-37-351	100	Vinyl	White	3.00 (76.20)	1.90 (48.26)		50	31	21	20	10	6
▲		PTL-37-422	100	Polyester	White	3.00 (76.20)	1.90 (48.26)		50	31	21	20	10	6
▲		PTL-37-423	100	Polyester	White	3.00 (76.20)	1.90 (48.26)		50	31	21	20	10	6
▲		PTL-37-424	100	Paper	White	3.00 (76.20)	1.90 (48.26)		50	31	21	20	10	6
▲		PTL-37-428	100	Polyester	Silver	3.00 (76.20)	1.90 (48.26)		50	31	21	20	10	6
▲		PTL-37-483	100	Polyester	White	3.00 (76.20)	1.90 (48.26)		50	31	21	20	10	6
▲		PTL-37-486	100	Polyester	Silver	3.00 (76.20)	1.90 (48.26)		50	31	21	20	10	6
▲		PTL-37-489	100	Polyester	White	3.00 (76.20)	1.90 (48.26)		50	31	21	20	10	6
4.00" Label Width														
▲		PTL-23-422	100	Polyester	White	4.00 (101.6)	1.00 (25.40)		50	42	28	9	5	3
▲		PTL-23-423	100	Polyester	White	4.00 (101.6)	1.00 (25.40)		50	42	28	9	5	3
▲		PTL-38-422	100	Polyester	White	4.00 (101.6)	1.90 (48.26)		50	41	30	20	10	6
▲		PTL-38-423	100	Polyester	White	4.00 (101.6)	1.90 (48.26)		50	41	30	20	10	6
▲		PTL-38-424	100	Paper	White	4.00 (101.6)	1.90 (48.26)		50	41	30	20	10	6
▲		PTL-38-428	100	Polyester	Silver	4.00 (101.6)	1.90 (48.26)		50	41	30	20	10	6
▲		PTL-38-459	100	Polyester	White	4.00 (101.6)	1.90 (48.26)		50	41	30	20	10	6
▲		PTL-38-483	100	Polyester	White	4.00 (101.6)	1.90 (48.26)		50	41	30	20	10	6
▲		PTL-38-486	100	Polyester	Silver	4.00 (101.6)	1.90 (48.26)		50	41	30	20	10	6
▲		PTL-38-489	100	Polyester	White	4.00 (101.6)	1.90 (48.26)		50	41	30	20	10	6

Any label two inches or larger is rotated on liner.

Note: Labels in chart are sorted in order by width, height, 3 digit material number (within part number), then die number (within part number).

* Also available in: YL=Yellow

**Also available in: OR=orange, GN=green, GY=grey, PL=purple, BL=blue, BR=brown, YL=yellow, RD=red.


To order a color, add a dash "-" after the material number, then add the color suffix.

Standard product: Contact your Brady Identification Solutions distributor or Customer Service representative for ordering information.

Electrical Application Labels



CABLE MARKING LABELS



PTL-21-400

TLS2200 technology
Die # 21, 1.00" x 2.50"
Material B-400, White Vinyl

PART NUMBER EXPLANATION:


Most Brady part numbers for printable labels follow the same three-part format:

The first code indicates the technology, the second part is a number indicating the die size used (where applicable) and the third part indicates the Brady material used (where applicable).

Repositional Vinyl Cloth (B-400), Self-Laminating Vinyl (B-427), Nylon Cloth (B-499), Self-Laminating Tedlar® (B-642)

Diagram	Part Number	Labels Per Roll	Label Dimensions		Write-On Height Inch (mm) C	Maximum Characters Per Line For Font:			Maximum Lines Of Text For Font:		
			A Inch (mm)	B Inch (mm)		2	7	10	2	7	10
▲	PTL-21-400	100	1.00 (25.40)	2.50 (63.50)	0.75 (19.05)	24	10	7	23	14	9
▶	PTL-21-427**	100	1.00 (25.40)	2.50 (63.50)	0.75 (19.05)	24	10	7	8	4	2
▶	BPTL-21-427	1000	1.00 (25.40)	2.50 (63.50)	0.75 (19.05)	24	10	7	8	4	2
▶	PTL-21-499	100	1.00 (25.40)	2.50 (63.50)	0.75 (19.05)	24	10	7	8	4	2
▶	PTL-21-642	100	1.00 (25.40)	2.50 (63.50)	0.75 (19.05)	24	10	7	8	4	2
▲	PTL-23-400	100	1.00 (25.40)	4.00 (101.60)	1.00 (25.40)	24	10	7	23	22	15
▶	PTL-23-427**	100	1.00 (25.40)	4.00 (101.60)	1.00 (25.40)	24	10	7	10	5	3
▶	BPTL-23-427	1000	1.00 (25.40)	4.00 (101.60)	1.00 (25.40)	24	10	7	10	5	3
▲	PTL-33-400	100	1.50 (38.10)	4.00 (101.60)	1.00 (25.40)	37	15	10	23	22	15
▶	PTL-33-427**	100	1.50 (38.10)	4.00 (101.60)	1.00 (25.40)	37	15	10	10	5	3
▶	BPTL-33-427	1000	1.50 (38.10)	4.00 (101.60)	1.00 (25.40)	37	15	10	10	5	3
▲	PTL-34-400	50	1.50 (38.10)	6.00 (152.40)	1.50 (38.10)	37	15	10	22	22	21
▶	PTL-34-427**	50	1.50 (38.10)	6.00 (152.40)	1.50 (38.10)	37	15	10	16	8	5
▶	BPTL-34-427	500	1.50 (38.10)	6.00 (152.40)	1.50 (38.10)	37	15	10	16	8	5

****Also available in: OR=orange, GN=green, GY=grey, PL=purple, BL=blue, BR=brown, YL=yellow, RD=red. To order a color, add a dash "-" after the material number, then add the color suffix. Standard product: Contact your Brady Identification Solutions distributor or Customer Service representative for ordering information.**




White or Yellow Tedlar® Film (B-437)

Part Number	Roll Length Ft. (m)	Label Dimensions		Maximum Characters Per Line For Font:			Maximum Lines Of Text For Font:		
		A Inch (mm)	B Inch (mm)	2	7	10	2	7	10
PTLCM-41-437W	50ft (15m)	1.50 (38.10)	continuous	37	15	10	14	7	4
PTLCM-41-437Y	50ft (15m)	1.50 (38.10)	continuous	37	15	10	14	7	4

Tedlar® is a registered trademark of DuPont.

Electrical Application Labels

CONTINUED



WIRE MARKING LABELS

Repositional Vinyl Cloth (B-400), Self-Laminating Vinyl (B-427), Nylon Cloth (B-499), Self-Laminating Tedlar® (B-642)

Diagram	Part Number	Labels Per Roll	Label Dimensions		Write-On Height Inch (mm) C	Maximum Characters Per Line For Font:			Maximum Lines Of Text For Font:		
			Inch (mm) A	Inch (mm) B		2	7	10	2	7	10
4 to 10 GAUGE WIRE (AWG) Based on THHN Wire - Maximum Wire Diameter - .26" (6.64mm)											
▲	PTL-28-499	750	0.25 (6.35)	1.50 (38.10)		5	2	1	16	8	5
▲	PTL-28-400	750	0.25 (6.35)	1.50 (38.10)		5	2	1	16	8	5
▲	PTL-28-427**	750	0.25 (6.35)	1.50 (38.10)	0.50 (12.70)	5	2	1	5	2	1
▲	PTL-29-400	500	0.50 (12.70)	1.50 (38.10)		11	5	3	16	8	5
▲	BPTL-29-400	5000	0.50 (12.70)	1.50 (38.10)		11	5	3	16	8	5
▶	PTL-29-427**	500	0.50 (12.70)	1.50 (38.10)	0.50 (12.70)	11	5	3	5	2	1
▶	PTL-29-499	500	0.50 (12.70)	1.50 (38.10)		11	5	3	16	8	5
▶	PTL-30-400	250	0.75 (19.05)	1.50 (38.10)		18	7	5	16	8	5
▶	PTL-30-427**	250	0.75 (19.05)	1.50 (38.10)	0.50 (12.70)	18	7	5	5	2	1
▶	BPTL-30-427	2500	0.75 (19.05)	1.50 (38.10)	0.50 (12.70)	18	7	5	5	2	1
▶	PTL-30-499	250	0.75 (19.05)	1.50 (38.10)		18	7	5	16	8	5
▶	PTL-31-427**	250	1.00 (25.40)	1.50 (38.10)	0.50 (12.70)	24	10	7	5	2	1
▶	BPTL-31-427	2500	1.00 (25.40)	1.50 (38.10)	0.50 (12.70)	24	10	7	5	2	1
▶	PTL-31-499	250	1.00 (25.40)	1.50 (38.10)		24	10	7	16	8	5
▶	PTL-31-400	250	1.00 (25.40)	1.50 (38.10)		24	10	7	16	8	5
▶	PTL-31-642	250	1.00 (25.40)	1.50 (38.10)	0.50 (12.70)	24	10	7	5	2	1
▶	PTL-32-427**	250	1.50 (38.10)	1.50 (38.10)	0.50 (12.70)	37	15	10	5	2	1
▶	BPTL-32-427	2500	1.50 (38.10)	1.50 (38.10)	0.50 (12.70)	37	15	10	5	2	1
10 to 12 GAUGE WIRE (AWG) Based on THHN Wire - Maximum Wire Diameter - .21" (5.30mm)											
▶	PTL-16-400	500	0.375 (9.52)	1.00 (25.40)		8	3	2	10	5	3
▶	PTL-16-499	500	0.375 (9.52)	1.00 (25.40)		8	3	2	10	5	3
▶	PTL-17-427*	500	0.50 (12.70)	1.00 (25.40)	0.375 (9.53)	11	5	3	3	1	1
▶	BPTL-17-427	5000	0.50 (12.70)	1.00 (25.40)	0.375 (9.53)	11	5	3	3	1	1
▶	PTL-18-400	250	0.75 (19.05)	1.00 (25.40)		18	7	5	10	5	3
▶	BPTL-18-400	2500	0.75 (19.05)	1.00 (25.40)		18	7	5	10	5	3
▶	PTL-18-499	250	0.75 (19.05)	1.00 (25.40)		18	7	5	10	5	3
▶	PTL-18-427*	250	0.75 (19.05)	1.00 (25.40)	0.375 (9.53)	18	7	5	3	1	1
▶	BPTL-18-427	2500	0.75 (19.05)	1.00 (25.40)	0.375 (9.53)	18	7	5	3	1	1
▶	PTL-19-400	250	1.00 (25.40)	1.00 (25.40)		24	10	7	10	5	3
▶	BPTL-19-400	2500	1.00 (25.40)	1.00 (25.40)		24	10	7	10	5	3
▶	PTL-19-499	250	1.00 (25.40)	1.00 (25.40)		24	10	7	10	5	3
▶	PTL-19-427**	250	1.00 (25.40)	1.00 (25.40)	0.375 (9.53)	24	10	7	3	1	1
▶	BPTL-19-427	2500	1.00 (25.40)	1.00 (25.40)	0.375 (9.53)	24	10	7	3	1	1
▶	PTL-19-642	250	1.00 (25.40)	1.00 (25.40)	0.375 (9.53)	24	10	7	3	1	1
10 to 16 GAUGE WIRE (AWG) Based on THHN Wire - Maximum Wire Diameter - .16" (4.10 mm)											
▶	PTL-10-427*	750	0.25 (6.35)	0.75 (19.05)	0.375 (9.53)	5	2	1	3	1	1
▶	PTL-11-400	500	0.50 (12.70)	0.75 (19.05)		11	5	3	8	4	2
▶	BPTL-11-400	5000	0.50 (12.70)	0.75 (19.05)		11	5	3	8	4	2
▶	PTL-11-427*	500	0.50 (12.70)	0.75 (19.05)	0.375 (9.53)	11	5	3	3	1	1
▶	BPTL-11-427	5000	0.50 (12.70)	0.75 (19.05)	0.375 (9.53)	11	5	3	3	1	1
▶	PTL-11-499	500	0.50 (12.70)	0.75 (19.05)		11	5	3	8	4	2
▶	BPTL-11-499	5000	0.50 (12.70)	0.75 (19.05)		11	5	3	8	4	2
16 to 22 GAUGE WIRE (AWG) Based on THHN Wire - Maximum Wire Diameter - .11" (2.80 mm)											
▶	PTL-7-400	500	0.50 (12.70)	0.50 (12.70)		11	5	3	5	2	1
▶	PTL-7-499	500	0.50 (12.70)	0.50 (12.70)		11	5	3	5	2	1

Tedlar® is a registered trademark of DuPont.

* Also available in: YL=Yellow

**Also available in: OR=orange, GN=green, GY=grey, PL=purple, BL=blue, BR=brown, YL=yellow, RD=red. To order a color, add a dash "-" after the material number, then add the color suffix.



Standard product: Contact your Brady Identification Solutions distributor or Customer Service representative for ordering information.

Electrical Application Labels

CONTINUED

PORTABLE PRINTERS
& LABELS

PERMASLEEVE™ WIRE MARKING SLEEVES



Heat-Shrinkable White Polyolefin (B-342)

Part Number	Sleeves Per Roll	Sleeve Dimensions		Range of Wire Dia.		Approx. Wire Gauge*	Maximum Characters Per Line For Font:			Maximum Lines Of Text For Font:		
		A Inch (mm)	B Inch (mm)	Min Inch (mm)	Max Inch (mm)		2	7	10	2	7	10
1.01" Marker Width												
WHITE 3:1 SHRINK RATIO												
PSPT-094-1W	100	1.015 (25.78)	.182 (4.62)	.023 (0.58)	.080 (2.03)	28-18	22	0	0	1	0	0
BPSPT-094-1W	1000	1.015 (25.78)	.182 (4.62)	.023 (0.58)	.080 (2.03)	28-18	22	0	0	1	0	0
PSPT-125-1W	100	1.015 (25.78)	.235 (5.96)	.046 (1.17)	.110 (2.79)	22-16	22	0	0	1	0	0
BPSPT-125-1W	1000	1.015 (25.78)	.235 (5.96)	.046 (1.17)	.110 (2.79)	22-16	22	0	0	1	0	0
PSPT-187-1W	100	1.015 (25.78)	.335 (8.50)	.062 (1.57)	.150 (3.81)	18-12	22	9	0	2	1	0
BPSPT-187-1W	1000	1.015 (25.78)	.335 (8.50)	.062 (1.57)	.150 (3.81)	18-12	22	9	0	2	1	0
PSPT-250-1W	100	1.015 (25.78)	.439 (11.15)	.094 (2.39)	.215 (5.46)	16-10	22	9	6	3	1	1
BPSPT-250-1W	1000	1.015 (25.78)	.439 (11.15)	.094 (2.39)	.215 (5.46)	16-10	22	9	6	3	1	1
PSPT-375-1W	100	1.015 (25.78)	.645 (16.38)	.125 (3.18)	.320 (8.13)	12-6	22	9	6	5	2	1
PSPT-500-1W	100	1.015 (25.78)	.851 (21.61)	.187 (4.75)	.450 (11.43)	8-1	22	9	6	7	3	2
PSPT-1000-1W	50	1.015 (25.78)	1.660 (42.16)	.450 (11.43)	.950 (24.13)	1-500	22	9	6	16	8	5
YELLOW 3:1 SHRINK RATIO												
PSPT-094-1Y	100	1.015 (25.78)	.182 (4.62)	.023 (0.58)	.080 (2.03)	28-18	22	0	0	1	0	0
PSPT-125-1Y	100	1.015 (25.78)	.235 (5.96)	.046 (1.17)	.110 (2.79)	22-16	22	0	0	1	0	0
PSPT-187-1Y	100	1.015 (25.78)	.335 (8.50)	.062 (1.57)	.150 (3.81)	18-12	22	9	0	2	1	0
PSPT-250-1Y	100	1.015 (25.78)	.439 (11.15)	.094 (2.39)	.215 (5.46)	16-10	22	9	6	3	1	1
PSPT-375-1Y	100	1.015 (25.78)	.645 (16.38)	.125 (3.18)	.320 (8.13)	12-6	22	9	6	5	2	1
PSPT-500-1Y	100	1.015 (25.78)	.851 (21.61)	.187 (4.75)	.450 (11.43)	8-1	22	9	6	7	3	2
PSPT-1000-1Y	50	1.015 (25.78)	1.660 (42.16)	.450 (11.43)	.950 (24.13)	1-500	22	9	6	16	8	5
1.76" Marker Width												
WHITE 3:1 SHRINK RATIO												
PSPT-094-175W	100	1.765 (44.83)	.182 (4.62)	.023 (0.58)	.080 (2.03)	28-18	41	0	0	1	0	0
BPSPT-094-175W	1000	1.765 (44.83)	.182 (4.62)	.023 (0.58)	.080 (2.03)	28-18	41	0	0	1	0	0
PSPT-125-175W	100	1.765 (44.83)	.235 (5.96)	.046 (1.17)	.110 (2.79)	22-16	41	0	0	1	0	0
BPSPT-125-175W	1000	1.765 (44.83)	.235 (5.96)	.046 (1.17)	.110 (2.79)	22-16	41	0	0	1	0	0
PSPT-187-175W	100	1.765 (44.83)	.335 (8.50)	.062 (1.57)	.150 (3.81)	18-12	41	17	11	3	1	1
BPSPT-187-175W	1000	1.765 (44.83)	.335 (8.50)	.062 (1.57)	.150 (3.81)	18-12	41	17	11	3	1	1
PSPT-250-175W	100	1.765 (44.83)	.439 (11.15)	.094 (2.39)	.215 (5.46)	16-10	41	17	11	3	1	1
BPSPT-250-175W	1000	1.765 (44.83)	.439 (11.15)	.094 (2.39)	.215 (5.46)	16-10	41	17	11	3	1	1
PSPT-375-175W	100	1.765 (44.83)	.645 (16.38)	.125 (3.18)	.320 (8.13)	12-6	41	17	11	5	2	1
BPSPT-375-175W	1000	1.765 (44.83)	.645 (16.38)	.125 (3.18)	.320 (8.13)	12-6	41	17	11	5	2	1
PSPT-500-175W	100	1.765 (44.83)	.851 (21.61)	.187 (4.75)	.450 (11.43)	8-1	41	17	11	7	3	2
BPSPT-500-175W	1000	1.765 (44.83)	.851 (21.61)	.187 (4.75)	.450 (11.43)	8-1	41	17	11	7	3	2
PSPT-1000-175W	50	1.765 (44.83)	1.660 (42.16)	.450 (11.43)	.950 (24.13)	1-500	41	17	11	16	8	5
BPSPT-1000-175W	500	1.765 (44.83)	1.660 (42.16)	.450 (11.43)	.950 (24.13)	1-500	41	17	11	16	8	5
YELLOW 3:1 SHRINK RATIO												
PSPT-094-175Y	100	1.765 (44.83)	.182 (4.62)	.023 (0.58)	.080 (2.03)	28-18	41	0	0	1	0	0
PSPT-125-175Y	100	1.765 (44.83)	.235 (5.96)	.046 (1.17)	.110 (2.79)	22-16	41	0	0	1	0	0
PSPT-187-175Y	100	1.765 (44.83)	.335 (8.50)	.062 (1.57)	.150 (3.81)	18-12	41	17	11	3	1	1
PSPT-250-175Y	100	1.765 (44.83)	.439 (11.15)	.094 (2.39)	.215 (5.46)	16-10	41	17	11	3	1	1
PSPT-375-175Y	100	1.765 (44.83)	.645 (16.38)	.125 (3.18)	.320 (8.13)	12-6	41	17	11	5	2	1
PSPT-500-175Y	100	1.765 (44.83)	.851 (21.61)	.187 (4.75)	.450 (11.43)	8-1	41	17	11	7	3	2
PSPT-1000-175Y	50	1.765 (44.83)	1.660 (42.16)	.450 (11.43)	.950 (24.13)	1-500	41	17	11	16	8	5


* Based on National Electric Code insulation measurement of THHN Wire.

Note: Labels are sorted in order by width, height, 3 digit material number (within part number), then die number (within part number).

TLS2200 / TLS PC LINK ELECTRICAL APPLICATION LABELS

Electrical Application Labels

CONTINUED




BRADYSLEEVE™ WIRE MARKING SLEEVES

Heat-Shrinkable White Polyolefin (B-321)

Part Number	Sleeves Per Roll	Sleeve Dimensions		Range of Wire Dia.		Approx. Wire Gauge*	Maximum Characters Per Line For Font:			Maximum Lines Of Text For Font:		
		A Inch (mm)	B Inch (mm)	Min Inch (mm)	Max Inch (mm)		2	7	10	2	7	10
.45" Sleeve Width												
PTS.45-350-321	500	.450 (11.43)	.350 (8.89)	.075 (1.90)	.160 (4.06)	10-16	9	3	0	2	1	0
PTS.45-500-321	500	.450 (11.43)	.500 (12.7)	.160 (4.06)	.235 (5.97)	8-10	9	3	2	4	2	1
.95" Sleeve Width												
PTS.95-350-321	500	.950 (24.13)	.350 (8.89)	.075 (1.90)	.160 (4.06)	10-16	21	9	0	2	1	0
PTS.95-500-321	500	.950 (24.13)	.500 (12.7)	.160 (4.06)	.235 (5.97)	8-10	21	9	6	4	2	1
PTS.95-750-321	250	.950 (24.13)	.750 (19.05)	.335 (8.51)	.390 (9.91)	2-4	21	9	6	7	3	2
PTS.95-1000-321	250	.950 (24.13)	1.00 (25.4)	.375 (9.53)	.540 (13.72)	00-1	21	9	6	10	5	3
1.90" Sleeve Width												
PTS.190-350-321	500	1.90 (48.26)	.350 (8.89)	.075 (1.90)	.160 (4.06)	10-16	44	18	0	2	1	0
PTS.190-500-321	500	1.90 (48.26)	.500 (12.7)	.160 (4.06)	.235 (5.97)	8-10	44	18	12	4	2	1
PTS.190-750-321	250	1.90 (48.26)	.750 (19.05)	.335 (8.51)	.390 (9.91)	2-4	44	18	12	7	3	2
PTS.190-1000-321	250	1.90 (48.26)	1.00 (25.4)	.375 (9.53)	.540 (13.72)	00-1	44	18	12	10	5	3

* Based on National Electric Code insulation measurement of THHN Wire.


Note: Labels are sorted in order by width, height, 3 digit material number (within part number), then die number (within part number).



BRADY TAGS® PRINTABLE TAGS

Polyethylene (B-109)

Diagram	Part Number	Tags Per Roll	Tag Dimensions		Maximum Characters Per Line For Font:			Maximum Lines Of Text For Font:			Applications/Description
			A Inch (mm)	B Inch (mm)	2	7	10	2	7	10	
▲	PTL-12-109	100	0.75 (19.05)	3.00 (76.20)	45	19	12	6	3	2	Product ID for harsh environments/tear resistant
▲	BPTL-12-109	1000	0.75 (19.05)	3.00 (76.20)	45	19	12	6	3	2	Product ID for harsh environments/tear resistant
▶	PTL-36-109	250	1.75 (44.45)	1.125 (28.57)	34	14	9	12	6	4	Product ID for harsh environments/tear resistant



TERMINAL BLOCK MARKERS

Repositional Vinyl Cloth (B-400)



Part Number	Roll Length Ft. (m)	Label Dimensions		Maximum Characters Per Line For Font:			Maximum Lines Of Text For Font:		
		A Inch (mm)	B Inch (mm)	2	7	10	2	7	10
PTLTB-400-240	30ft (9m)	.240 (6.09)	continuous	5	2	1	—	—	—
BPTLTB-400-240	300ft (9m)	.240 (6.09)	continuous	5	2	1	—	—	—
PTLTB-400-318	30ft (9m)	.318 (8.07)	continuous	7	3	2	—	—	—
BPTLTB-400-318	300ft (9m)	.318 (8.07)	continuous	7	3	2	—	—	—
PTLTB-400-375	30ft (9m)	.375 (9.52)	continuous	8	3	2	—	—	—
BPTLTB-400-375	300ft (9m)	.375 (9.52)	continuous	8	3	2	—	—	—

Data Communications Equipment and Cabling Labels

PORTABLE PRINTERS & LABELS

TLS2200 / TLS PC LINK DATA COMMUNICATIONS LABELS

VOICE AND DATA CABLING LABELS

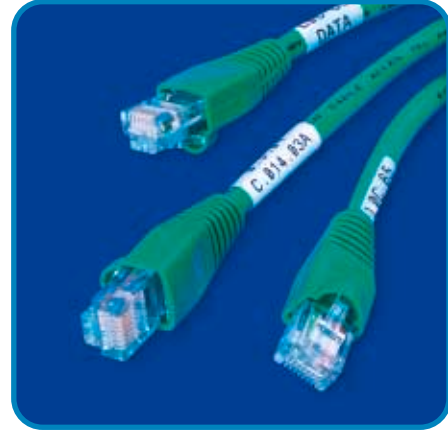

All *B-427 parts listed in Voice and Data Cabling section are available in the following colors:


- YL = Yellow (For auxiliary, maintenance, alarms, security, etc.)
- GY = Gray (For backbone cable between intermediate cross-connect and a telecommunications closet)
- OR = Orange (Central office termination)
- PL = Purple (Major switching and data equipment terminations)
- GN = Green (Network connections)
- BL = Blue (For horizontal cable terminations)
- BR = Brown (For campus backbone cable terminations)
- RD = Red (For all key telephone equipment terminations)

* Standard product, contact your distributor or customer service representative for ordering information

Self-Laminating Vinyl (B-427), Low Smoke Self-Laminating Tedlar® (B-642)

Part Number	Labels Per Roll	Label Dimension			Application	Maximum Characters Per Line For Font:			Maximum Lines of Text For Font:		
		A Inches (mm)	B Inches (mm)	C Inches (mm)		2	7	10	2	7	10
PTL-29-427	500	0.50 (12.70)	1.50 (38.10)	0.50 (12.70)	CAT-5, 4 pair UTP Copper	11	5	3	5	2	1
BPTL-29-427	5000	0.50 (12.70)	1.50 (38.10)	0.50 (12.70)	CAT-5, 4 pair UTP Copper	11	5	3	5	2	1
PTL-30-427	250	0.75 (19.05)	1.50 (38.10)	0.50 (12.70)	CAT-5, 4 pair UTP Copper	18	7	5	5	2	1
BPTL-30-427	2500	0.75 (19.05)	1.50 (38.10)	0.50 (12.70)	CAT-5, 4 pair UTP Copper	18	7	5	5	2	1
PTL-19-427	250	1.00 (25.40)	1.00 (25.40)	0.375 (9.52)	2 pair Fiber, Single/Multi-Mode	24	10	7	3	1	1
BPTL-19-427	2500	1.00 (25.40)	1.00 (25.40)	0.375 (9.52)	2 pair Fiber, Single/Multi-Mode	24	10	7	3	1	1
PTL-19-642	250	1.00 (25.40)	1.00 (25.40)	0.375 (9.52)	2 pair Fiber, Plenum Grade	24	10	7	3	1	1
PTL-31-427	250	1.00 (25.40)	1.50 (38.10)	0.50 (12.70)	CAT-5, 4 pair UTP Copper	24	10	7	5	2	1
BPTL-31-427	2500	1.00 (25.40)	1.50 (38.10)	0.50 (12.70)	CAT-5, 4 pair UTP Copper	24	10	7	5	2	1
PTL-31-642	250	1.00 (25.40)	1.50 (38.10)	0.50 (12.70)	CAT-5, Plenum Grade	24	10	7	5	2	1
PTL-21-427	100	1.00 (25.40)	2.50 (63.50)	0.75 (19.05)	25 pair Copper, 4-12 pair Fiber	24	10	7	8	4	2
BPTL-21-427	1000	1.00 (25.40)	2.50 (63.50)	0.75 (19.05)	25 pair Copper, 4-12 pair Fiber	24	10	7	8	4	2
PTL-21-642	100	1.00 (25.40)	2.50 (63.50)	0.75 (19.05)	25 pair Copper, Plenum Grade	24	10	7	8	4	2
PTL-23-427	100	1.00 (25.40)	4.00 (101.60)	1.00 (25.40)	50 pair Copper, 24 pair Fiber	24	10	7	10	5	3
BPTL-23-427	1000	1.00 (25.40)	4.00 (101.60)	1.00 (25.40)	50 pair Copper, 24 pair Fiber	24	10	7	10	5	3
PTL-33-427	100	1.50 (38.10)	4.00 (101.60)	1.00 (25.40)	50 pair Copper, 24 pair Fiber	37	15	10	10	5	3
BPTL-33-427	1000	1.50 (38.10)	4.00 (101.60)	1.00 (25.40)	50 pair Copper, 24 pair Fiber	37	15	10	10	5	3
PTL-34-427	50	1.50 (38.10)	6.00 (152.40)	1.50 (38.10)	100 pair Copper, 36 pair Fiber	37	15	10	16	8	5
BPTL-34-427	500	1.50 (38.10)	6.00 (152.40)	1.50 (38.10)	100 pair Copper, 36 pair Fiber	37	15	10	16	8	5

Tedlar® is a registered trademark of DuPont.

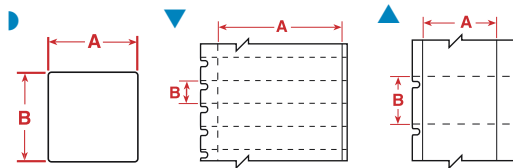

WORKSTATION LABELS


Polypropylene (B-412), Permanent Glossy Polyester (B-422), Clear Polyester (B-430)

Diagram	Part Number	Labels Per Roll	Label Dimensions		Applications	Maximum Characters Per Line For Font:			Maximum Lines Of Text For Font:		
			A Inch (mm)	B Inch (mm)		2	7	10	2	7	10
▶	PTL-7-422	500	0.50 (12.70)	0.50 (12.70)	1-6 Outlet Faceplates	11	5	3	5	2	1
▶	PTL-7-430	500	0.50 (12.70)	0.50 (12.70)	1-6 Outlet Faceplates	11	5	3	5	2	1
▶	PTL-16-422	500	1.00 (25.40)	0.375 (9.52)	1-4 Outlet Faceplates	24	10	7	3	1	1
▶	PTL-16-430	500	1.00 (25.40)	0.375 (9.52)	1-4 Outlet Faceplates	24	10	7	3	1	1
▶	PTL-17-422	500	1.00 (25.40)	0.50 (12.70)	1-4 Outlet Faceplates	24	10	7	5	2	1
▶	PTL-17-430	500	1.00 (25.40)	0.50 (12.70)	1-4 Outlet Faceplates	24	10	7	5	2	1
▶	PTL-29-422	500	1.50 (38.10)	0.50 (12.70)	1-2 Outlet Faceplates	37	15	10	5	2	1
▶	PTL-29-430	500	1.50 (38.10)	0.50 (12.70)	1-2 Outlet Faceplates	37	15	10	5	2	1
▲	PTL-39-422	750	0.375 (9.52)	0.60 (15.24)	1-2 Outlet Faceplates	8	3	2	6	3	2
▲	PTL-39-430	750	0.375 (9.52)	0.60 (15.24)	1-6 Outlet Faceplates	8	3	2	6	3	2
▼	PTL-40-412	750	1.938 (49.23)	0.375 (9.52)	Faceplates with DESI-STRIP	40	17	11	3	1	1
▼	BPTL-40-412	5000	1.938 (49.23)	0.375 (9.52)	Faceplates with DESI-STRIP	40	17	11	3	1	1
▶	PTL-44-422	500	0.50 (12.70)	0.375 (9.52)	1-6 Outlet Faceplates	11	5	3	3	1	1
▶	PTL-44-430	500	0.50 (12.70)	0.375 (9.52)	1-6 Outlet Faceplates	11	5	3	3	1	1
▶	PTL-45-422	500	1.50 (38.10)	0.375 (9.52)	1-2 Outlet Faceplates	37	15	10	3	1	1
▶	PTL-45-430	500	1.50 (38.10)	0.375 (9.52)	1-2 Outlet Faceplates	37	15	10	3	1	1

Data Communications Equipment and Cabling Labels

CONTINUED

PORTABLE PRINTERS & LABELS

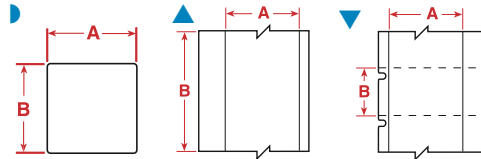


► PATCH PANEL IDENTIFICATION

Permanent Glossy Polyester (B-422), Clear Polyester (B-430), Vinyl (B-439)

Diagram	Part Number	Labels Per Roll	Label Dimensions		Applications	Maximum Characters Per Line For Font:			Maximum Lines Of Text For Font:		
			A Inch (mm)	B Inch (mm)		2	7	10	2	7	10
▶	PTL-7-422	500	0.50 (12.70)	0.50 (12.70)	Patch Panel - Label Each Port	11	5	3	5	2	1
▶	PTL-7-430	500	0.50 (12.70)	0.50 (12.70)	Patch Panel - Label Each Port	11	5	3	5	2	1
▲	PTL-8-422	50ft (15m)	0.50 (12.70)	continuous	Outlet, Patch Panel, Cont. Tape - Cut to Size	50	50	50	5	2	1
▲	PTL-8-430	50ft (15m)	0.50 (12.70)	continuous	Outlet, Patch Panel, Cont. Tape - Cut to Size	50	50	50	5	2	1
▲	PTL-8-439	50ft (15m)	0.50 (12.70)	continuous	Outlet, Patch Panel, Cont. Tape - Cut to Size	50	50	50	5	2	1
▲	PTL-8-439OR	50ft (15m)	0.50 (12.70)	continuous	Outlet, Patch Panel, Cont. Tape - Cut to Size	50	50	50	5	2	1
▲	PTL-8-439YL	50ft (15m)	0.50 (12.70)	continuous	Outlet, Patch Panel, Cont. Tape - Cut to Size	50	50	50	5	2	1
▲	PTL-8-439-RD	50ft (15m)	0.50 (12.70)	continuous	Outlet, Patch Panel, Cont. Tape - Cut to Size	50	50	50	5	2	1
▼	PTL-39-422	750	0.375 (9.52)	0.60 (15.24)	Patch Panel	8	3	2	6	3	2
▼	PTL-39-430	750	0.375 (9.52)	0.60 (15.24)	Patch Panel	8	3	2	6	3	2
▲	PTL-46-422	50 ft (15m)	0.375 (9.52)	continuous	Outlet, Patch Panel, Cont. Tape - Cut to Size	50	50	50	3	1	1
▲	PTL-46-430	50 ft (15m)	0.375 (9.52)	continuous	Outlet, Patch Panel, Cont. Tape - Cut to Size	50	50	50	3	1	1

► GENERAL COMMUNICATION IDENTIFICATION



Permanent Glossy Polyester (B-422), Clear Polyester (B-430), Vinyl (B-439), Ultra-Aggressive Glossy Polyester (B-483)

Diagram	Part Number	Labels Per Roll	Label Dimensions		Applications	Maximum Characters Per Line For Font:			Maximum Lines Of Text For Font:		
			A Inch (mm)	B Inch (mm)		2	7	10	2	7	10
▲	PTL-8-422	50ft (15m)	0.50 (12.70)	continuous	Outlet, Patch Panel, Cont. Tape - Cut to Size	50	50	50	5	2	1
▲	PTL-8-430	50ft (15m)	0.50 (12.70)	continuous	Outlet, Patch Panel, Cont. Tape - Cut to Size	50	50	50	5	2	1
▲	PTL-8-439	50ft (15m)	0.50 (12.70)	continuous	Outlet, Patch Panel, Cont. Tape - Cut to Size	50	50	50	5	2	1
▲	PTL-8-439OR	50ft (15m)	0.50 (12.70)	continuous	Outlet, Patch Panel, Cont. Tape - Cut to Size	50	50	50	5	2	1
▲	PTL-8-439YL	50ft (15m)	0.50 (12.70)	continuous	Outlet, Patch Panel, Cont. Tape - Cut to Size	50	50	50	5	2	1
▲	PTL-8-439-RD	50ft (15m)	0.50 (12.70)	continuous	Outlet, Patch Panel, Cont. Tape - Cut to Size	50	50	50	5	2	1
▶	PTL-20-422	100	2.00 (50.80)	1.00 (25.40)	General Identification	46	19	13	10	5	3
▶	BPTL-20-422	1000	2.00 (50.80)	1.00 (25.40)	General Identification	46	19	13	10	5	3
▶	PTL-28-430	750	1.50 (38.10)	.25 (6.35)	General Identification	37	15	0	2	1	0
▲	PTL-42-430	50	1.00 (25.40)	continuous	General Identification	50	50	50	5	4	3
▲	PTL-42-439	50	1.00 (25.40)	continuous	General Identification	50	50	50	5	4	3
▲	PTL-42-439OR	50	1.00 (25.40)	continuous	General Identification	50	50	50	5	4	3
▲	PTL-42-439YL	50	1.00 (25.40)	continuous	General Identification	50	50	50	5	4	3
▲	PTL-42-439RD	50	1.00 (25.40)	continuous	General Identification	50	50	50	5	4	3
▲	PTL-42-483	50	1.00 (25.40)	continuous	General Identification	50	50	50	5	4	3
▲	PTL-42-422	50	1.00 (25.40)	continuous	General Identification	50	50	50	5	4	3

Custom colors and sizes are available.



TLS2200 / TLS PC LINK DATA COMMUNICATIONS LABELS

Industrial Application Labels


PORTABLE PRINTERS & LABELS

INDUSTRIAL LABEL SELECTION CHART BASED ON TYPE OF SURFACE

Part Number	SMOOTH (Examples: Uncoated Metal, Plastic, Glass)	TEXTURED/ROUGH (Examples: Textured ABS, Cast Metal, Polycarbonate)	HIGHLY TEXTURED/LOW SURFACE ENERGY (Examples: Powder Coated, Low Surface Energy ABS, Polypropylene)
PERMANENT B-351 B-423* B-424 B-428*• B-430 B-459* B-473*	■ YES	NO	NO
AGGRESSIVE B-422* B-435*• B-439	■ YES	■ YES	NO
ULTRA-AGGRESSIVE B-483* B-486* B-489	■ YES	■ YES	■ YES

* Material UL recognized/CSA approved

• Material AGA approved



RATING/NAMEPLATE LABELS

Permanent Glossy Polyester (B-422, B-423, B-459), General Purpose White Paper (B-424), Permanent Metallized Polyester (B-428), Ultra-Aggressive Glossy Polyester (B-483), Ultra-Aggressive Matte Metalized Polyester (B-486), Ultra-Aggressive Matte Polyester (B-489)

Surface Suitability	Diagram	Part Number	Labels Per Roll	Label Dimensions		Applications/Description	Maximum Characters Per Line For Font:			Maximum Lines Of Text For Font:		
				A Inch (mm)	B Inch (mm)		2	7	10	2	7	10
■	▲	PTL-8-428	50ft (15m)	0.50 (12.70)	continuous	Small ICs: silver finish	50	50	50	5	2	1
■	▲	PTL-16-483	500	1.00 (25.40)	0.375 (9.52)	Asset ID for textured surfaces	24	10	7	3	1	1
■	▲	PTL-16-486	500	1.00 (25.40)	0.375 (9.52)	Asset ID for oily, greasy, and textured surfaces	24	10	7	3	1	1
■	▲	PTL-16-489	500	1.00 (25.40)	0.375 (9.52)	Asset ID for oily, greasy, and textured surfaces	24	10	7	3	1	1
■	▲	PTL-17-428	500	1.00 (25.40)	0.50 (12.70)	General-purpose over-laminated identification	24	10	7	5	2	1
■	▲	BPTL-17-428	5000	1.00 (25.40)	0.50 (12.70)	General-purpose over-laminated identification	24	10	7	5	2	1
■	▲	PTL-17-483	500	1.00 (25.40)	0.50 (12.70)	Asset ID for textured surfaces	24	10	7	5	2	1
■	▲	PTL-17-486	500	1.00 (25.40)	0.50 (12.70)	Asset ID for oily, greasy, and textured surfaces	24	10	7	5	2	1
■	▲	PTL-17-489	500	1.00 (25.40)	0.50 (12.70)	Asset ID for oily, greasy, and textured surfaces	24	10	7	5	2	1
■	▲	PTL-19-422	250	1.00 (25.40)	1.00 (25.40)	Asset ID for textured surfaces	24	10	7	10	5	3
■	▲	PTL-19-423	250	1.00 (25.40)	1.00 (25.40)	Rating plate	24	10	7	10	5	3
■	▲	BPTL-19-423	2500	1.00 (25.40)	1.00 (25.40)	Rating plate	24	10	7	10	5	3
■	▲	PTL-19-483	250	1.00 (25.40)	1.00 (25.40)	Asset ID for textured surfaces	24	10	7	10	5	3
■	▲	PTL-19-486	250	1.00 (25.40)	1.00 (25.40)	Asset ID for oily, greasy, and textured surfaces	24	10	7	10	5	3
■	▲	PTL-19-489	250	1.00 (25.40)	1.00 (25.40)	Asset ID for oily, greasy, and textured surfaces	24	10	7	10	5	3
■	▲	PTL-20-424	100	2.00 (50.80)	1.00 (25.40)	General identification and Asset ID	46	19	13	10	5	3
■	▲	BPTL-20-424	100	2.00 (50.80)	1.00 (25.40)	General identification and Asset ID	46	19	13	10	5	3

* Any label two inches or larger is rotated on liner.

- Material suitable for smooth surfaces.
- Material suitable for smooth and textured surfaces.
- Material suitable for smooth, textured and highly textured surfaces.

TLS2200 / TLS PC LINK INDUSTRIAL APPLICATION LABELS

Industrial Application Labels

CONTINUED



PORTABLE PRINTERS & LABELS


INDUSTRIAL APPLICATION LABELS

TLS2200 / TLS PC LINK

25

RATING/NAMEPLATE LABELS

CONTINUED



Permanent Glossy Polyester (B-422, B-423, B-459), General Purpose White Paper (B-424), Permanent Metallized Polyester (B-428), Ultra-Aggressive Glossy Polyester (B-483), Ultra-Aggressive Matte Metallized Polyester (B-486), Ultra-Aggressive Matte Polyester (B-489)

Surface Suitability	Diagram	Part Number	Labels Per Roll	Label Dimensions		Applications/Description	Maximum Characters Per Line For Font:			Maximum Lines Of Text For Font:		
				A Inch (mm)	B Inch (mm)		2	7	10	2	7	10
■	▲	PTL-20-428	100	2.00 (50.80)	1.00 (25.40)	Asset ID, silver finish	46	19	13	10	5	3
■	▲	BPTL-20-428	1000	2.00 (50.80)	1.00 (25.40)	Asset ID, silver finish	46	19	13	10	5	3
■	▲	PTL-20-483	100	2.00 (50.80)	1.00 (25.40)	Asset ID for textured surfaces	46	19	13	10	5	3
■	▲	PTL-20-486	100	2.00 (50.80)	1.00 (25.40)	Asset ID for oily, greasy, and textured surfaces	46	19	13	10	5	3
■	▲	PTL-20-489	100	2.00 (50.80)	1.00 (25.40)	Asset ID for oily, greasy, and textured surfaces	46	19	13	10	5	3
■	▲	PTL-22-422	100	3.00 (46.20)	1.00 (25.40)	General identification	50	31	21	10	5	3
■	▲	PTL-22-423	100	3.00 (46.20)	1.00 (25.40)	General identification	50	31	21	10	5	3
■	▲	PTL-22-424	100	3.00 (46.20)	1.00 (25.40)	General identification	50	31	21	10	5	3
■	▲	PTL-22-428	100	3.00 (46.20)	1.00 (25.40)	Rating plate	50	31	21	10	5	3
■	▲	PTL-22-459	100	3.00 (46.20)	1.00 (25.40)	General identification	50	31	21	10	5	3
■	▲	PTL-23-422	100	4.00 (101.60)	1.00 (25.40)	General identification	50	42	28	10	5	3
■	▲	PTL-23-423	100	4.00 (101.60)	1.00 (25.40)	General identification	50	42	28	10	5	3
■	▶	PTL-24-423-BK 500	500	1.13 (28.70)	0.50 (12.70)	1/16" (1.6mm) Black-bordered component identification	24	10	7	3	1	1
■	▶	PTL-24-428-BK 500	500	1.13 (28.70)	0.50 (12.70)	1/16" (1.6mm) Black-bordered component identification	24	10	7	3	1	1
■	▶	PTL-24-483-BK 500	500	1.13 (28.70)	0.50 (12.70)	1/16" (1.6mm) Black-bordered component identification	24	10	7	3	1	1
■	▶	PTL-24-486-BK 500	500	1.13 (28.70)	0.50 (12.70)	1/16" (1.6mm) Black-bordered component identification	24	10	7	3	1	1
■	▲	PTL-26-423	100	2.75 (69.85)	1.25 (31.75)	General identification and Asset ID	50	29	19	13	6	4
■	▲	PTL-26-428	100	2.75 (69.85)	1.25 (31.75)	General identification and Asset ID	50	29	19	13	6	4
■	▲	PTL-29-428	500	1.50 (38.10)	0.50 (12.70)	Faceplates, panels, equipment, silver finish	37	15	10	5	2	1
■	▲	PTL-29-483	500	1.50 (38.10)	0.50 (12.70)	Asset ID for textured surfaces	37	15	10	5	2	1
■	▲	PTL-29-486	500	1.50 (38.10)	0.50 (12.70)	Asset ID for oily, greasy, and textured surfaces	37	15	10	5	2	1
■	▲	PTL-29-489	500	1.50 (38.10)	0.50 (12.70)	Asset ID for oily, greasy, and textured surfaces	37	15	10	5	2	1
■	▲	PTL-30-422	250	1.50 (38.10)	0.75 (19.05)	Asset ID for textured surfaces	37	15	10	8	4	2
■	▲	PTL-30-483	250	1.50 (38.10)	0.75 (19.05)	Asset ID for oily, greasy, and textured surfaces	37	15	10	8	4	2
■	▲	PTL-30-486	250	1.50 (38.10)	0.75 (19.05)	Asset ID for oily, greasy, and textured surfaces	37	15	10	8	4	2
■	▲	PTL-30-489	250	1.50 (38.10)	0.75 (19.05)	Asset ID for oily, greasy, and textured surfaces	37	15	10	8	4	2
■	▲	PTL-31-423	250	1.50 (38.10)	1.00 (25.40)	General identification	37	15	10	10	5	3
■	▲	PTL-31-483	250	1.50 (38.10)	1.00 (25.40)	Asset ID for textured surfaces	37	15	10	10	5	3
■	▲	PTL-31-486	250	1.50 (38.10)	1.00 (25.40)	Asset ID for oily, greasy, and textured surfaces	37	15	10	10	5	3
■	▲	PTL-31-489	250	1.50 (38.10)	1.00 (25.40)	Asset ID for oily, greasy, and textured surfaces	37	15	10	10	5	3
■	▲	PTL-32-423	250	1.50 (38.10)	1.50 (38.10)	General identification	37	15	10	16	8	5
■	▲	PTL-32-483	250	1.50 (38.10)	1.50 (38.10)	Asset ID for textured surfaces	37	15	10	16	8	5
■	▲	PTL-32-486	250	1.50 (38.10)	1.50 (38.10)	Asset ID for oily, greasy, and textured surfaces	37	15	10	16	8	5
■	▲	PTL-32-489	250	1.50 (38.10)	1.50 (38.10)	Asset ID for oily, greasy, and textured surfaces	37	15	10	16	8	5
■	▲	PTL-37-422	100	3.00 (76.20)	1.90 (48.26)	Asset ID for textured surfaces	50	31	21	20	10	6
■	▲	PTL-37-423	100	3.00 (76.20)	1.90 (48.26)	General identification and Asset ID	50	31	21	20	10	6
■	▲	PTL-37-424	100	3.00 (76.20)	1.90 (48.26)	General identification and Asset ID	50	31	21	20	10	6
■	▲	PTL-37-428	100	3.00 (76.20)	1.90 (48.26)	Asset ID, silver finish	50	31	21	20	10	6
■	▲	PTL-37-483	100	3.00 (76.20)	1.90 (48.26)	Asset ID for oily, greasy, and textured surfaces	50	31	21	20	10	6

* Any label two inches or larger is rotated on liner.


- Material suitable for smooth surfaces.
- Material suitable for smooth and textured surfaces.
- Material suitable for smooth, textured and highly textured surfaces.

Industrial Application Labels

CONTINUED

PORTABLE PRINTERS & LABELS

TLS2200 / TLS PC LINK INDUSTRIAL APPLICATION LABELS




RATING/NAMEPLATE LABELS

CONTINUED

Surface Suitability	Diagram	Part Number	Labels Per Roll	Label Dimensions		Applications/Description	Maximum Characters Per Line For Font:			Maximum Lines Of Text For Font:		
				A Inch (mm)	B Inch (mm)		2	7	10	2	7	10
■	▲	PTL-37-486	100	3.00 (76.20)	1.90 (48.26)	Asset ID for oily, greasy, and textured surfaces	50	31	21	20	10	6
■	▲	PTL-37-489	100	3.00 (76.20)	1.90 (48.26)	Asset ID for oily, greasy, and textured surfaces	50	31	21	20	10	6
■	▲	PTL-38-422	100	4.00 (101.6)	1.90 (48.26)	Asset ID for textured surfaces	50	41	30	20	10	6
■	▲	PTL-38-423	100	4.00 (101.6)	1.90 (48.26)	General identification and Asset ID	50	41	30	20	10	6
■	▲	PTL-38-424	100	4.00 (101.6)	1.90 (48.26)	General identification and Asset ID	50	41	30	20	10	6
■	▲	PTL-38-428	100	4.00 (101.6)	1.90 (48.26)	Asset ID, silver finish	50	41	30	20	10	6
■	▲	PTL-38-483	100	4.00 (101.6)	1.90 (48.26)	Asset ID for oily, greasy, and textured surfaces	50	41	30	20	10	6
■	▲	PTL-38-486	100	4.00 (101.6)	1.90 (48.26)	Asset ID for oily, greasy, and textured surfaces	50	41	30	20	10	6
■	▲	PTL-38-489	100	4.00 (101.6)	1.90 (48.26)	Asset ID for oily, greasy, and textured surfaces	50	41	30	20	10	6

* Any label two inches or larger is rotated on liner.




PERMASHIELD LABELS

Permanent Glossy Polyester (B-422), General Purpose White Paper (B-424), Permanent Metalized Polyester (B-428)

Surface Suitability	Part Number	Labels Per Roll	Label Dimensions		Overlamine Dimensions		Maximum Characters Per Line For Font:			Maximum Lines Of Text For Font:		
			A Inch (mm)	B Inch (mm)	C Inch (mm)	D Inch (mm)	2	7	10	2	7	10
■	PTPSL-17-422	500	1.00 (25.40)	0.50 (12.70)	1.25 (31.75)	0.75 (19.05)	24	10	7	5	2	1
■	PTPSL-17-424	500	1.00 (25.40)	0.50 (12.70)	1.25 (31.75)	0.75 (19.05)	24	10	7	5	2	1
■	PTPSL-17-428	500	1.00 (25.40)	0.50 (12.70)	1.25 (31.75)	0.75 (19.05)	24	10	7	5	2	1
■	PTPSL-20-422	100	2.00 (50.80)	1.00 (25.40)	2.25 (57.15)	1.25 (31.75)	46	19	13	10	5	3
■	PTPSL-20-424	100	2.00 (50.80)	1.00 (25.40)	2.25 (57.15)	1.25 (31.75)	46	19	13	10	5	3
■	PTPSL-20-428	100	2.00 (50.80)	1.00 (25.40)	2.25 (57.15)	1.25 (31.75)	46	19	13	10	5	3
■	PTPSL-26-422	100	2.75 (69.85)	1.25 (31.75)	3.00 (76.20)	1.50 (38.10)	50	29	19	13	6	4
■	PTPSL-26-428	100	2.75 (69.85)	1.25 (31.75)	3.00 (76.20)	1.50 (38.10)	50	29	19	13	6	4
■	PTPSL-50-422	100	3.00 (76.20)	1.65 (41.91)	3.25 (82.55)	1.90 (48.26)	75	31	21	18	9	6
■	PTPSL-50-428	100	3.00 (76.20)	1.65 (41.91)	3.25 (82.55)	1.90 (48.26)	75	31	21	18	9	6

PRE-PRINTED LABELS

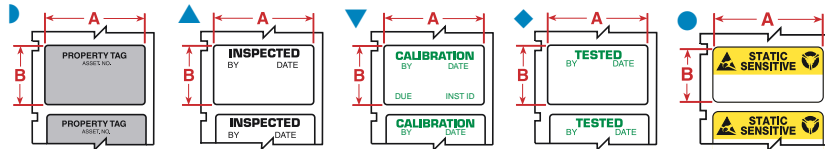

Permanent Glossy Polyester (B-422, B-423), Permanent Metallized Polyester (B-428), Permanent Silver Polyester (B-435), Static Dissipative Polyester (B-473)


Surface Suitability	Diagram	Part Number	Labels Per Roll	Label Dimensions		Description
				A Inch (mm)	B Inch (mm)	
■	●	PTLSL-17-473	500	1.00 (25.40)	0.50 (12.70)	Static Sensitive
■	▼	PTL-30-423-CALI	250	1.50 (38.10)	0.75 (19.05)	Calibration
■	▼	PTL-30-428-CALI	250	1.50 (38.10)	0.75 (19.05)	Calibration
■	◆	PTL-30-423-TEST	250	1.50 (38.10)	0.75 (19.05)	Tested
■	◆	PTL-30-428-TEST	250	1.50 (38.10)	0.75 (19.05)	Tested
■	▲	PTL-30-423-INSP	250	1.50 (38.10)	0.75 (19.05)	Inspected By
■	▲	PTL-30-428-INSP	250	1.50 (38.10)	0.75 (19.05)	Inspected By
■	▶	PTL-35-422-PROP	250	1.63 (41.40)	0.75 (19.05)	Property Tag
■	▶	PTL-35-423-PROP	250	1.63 (41.40)	0.75 (19.05)	Property Tag
■	▶	PTL-35-428-PROP	250	1.63 (41.40)	0.75 (19.05)	Property Tag
■	▶	PTL-35-435-PROP	250	1.63 (41.40)	0.75 (19.05)	Property Tag

■ Material suitable for smooth surfaces.
 ■ Material suitable for smooth and textured surfaces.
 ■ Material suitable for smooth, textured and highly textured surfaces.

Industrial Application Labels

CONTINUED


TAMPER-EVIDENT LABELS



Tamper-Evident Vinyl (B-351)

Surface Suitability	Part Number	Labels Per Roll	Label Dimensions		Maximum Characters Per Line For Font:			Maximum Lines Of Text For Font:		
			A Inch (mm)	B Inch (mm)	2	7	10	2	7	10
■	PTL-17-351	500	1.00 (25.40)	0.50 (12.70)	24	10	7	5	2	1
■	PTL-20-351	100	2.00 (50.80)	1.00 (25.40)	46	19	13	10	5	3
■	PTL-31-351	250	1.50 (38.10)	1.00 (25.40)	37	15	10	10	5	3
■	PTL-37-351	100	3.00 (76.20)	1.90 (48.26)	50	31	21	20	10	6

GENERAL INDUSTRIAL LABELS



Permanent Glossy Polyester (B-422), Permanent Clear Polyester (B-430), Permanent Colored Vinyl (B-439), Ultra-Aggressive Glossy Polyester (B-483)

Surface Suitability	Part Number	Labels Per Row	Label Dimensions		Maximum Characters Per Line For Font:			Maximum Lines Of Text For Font:		
			A Inch (mm)	B Inch (mm)	7	10	14	7	10	14
■	PTL-42-422	50ft (15m)	1.00 (25.40)	continuous	50	50	50	5	3	2
■	PTL-42-430	50ft (15m)	1.00 (25.40)	continuous	50	50	50	5	3	2
■	PTL-42-439	50ft (15m)	1.00 (25.40)	continuous	50	50	50	5	3	2
■	PTL-42-439OR	50ft (15m)	1.00 (25.40)	continuous	50	50	50	5	3	2
■	PTL-42-439YL	50ft (15m)	1.00 (25.40)	continuous	50	50	50	5	3	2
■	PTL-42-439RD	50ft (15m)	1.00 (25.40)	continuous	50	50	50	5	3	2
■	PTL-42-483	50ft (15m)	1.00 (25.40)	continuous	50	50	50	5	3	2
■	PTL-43-422	50ft (15m)	1.90 (48.26)	continuous	50	50	50	10	6	4
■	PTL-43-430	50ft (15m)	1.90 (48.26)	continuous	50	50	50	10	6	4
■	PTL-43-439	50ft (15m)	1.90 (48.26)	continuous	50	50	50	10	6	4
■	PTL-43-439OR	50ft (15m)	1.90 (48.26)	continuous	50	50	50	10	6	4
■	PTL-43-439YL	50ft (15m)	1.90 (48.26)	continuous	50	50	50	10	6	4
■	PTL-43-439RD	50ft (15m)	1.90 (48.26)	continuous	50	50	50	10	6	4
■	PTL-43-483	50ft (15m)	1.90 (48.26)	continuous	50	50	50	10	6	4

- Material suitable for smooth surfaces.
- Material suitable for smooth and textured surfaces.
- Material suitable for smooth, textured and highly textured surfaces.

Custom Label Options

Custom sizes, colors and partially preprinted labels are also available. Contact your Brady Identification Solutions distributor or Customer Service representative for ordering information.



PORTABLE PRINTERS & LABELS

INDUSTRIAL APPLICATION LABELS

Electronic Application Labels

PORTABLE PRINTERS & LABELS


THERMAL TRANSFER PRINTABLE PRODUCTS CIRCUIT BOARD PROCESS CHART

	 Through Hole Technology Top Bottom		 Surface Mount Technology (SMT) Top or Bottom		After Process
B-426, B-457, B-477	● Yes	● Yes	● Yes		● Yes
B-400, B-422, B-423, B-428, B-430, B-459, B-473	▲ Yes*	✗ No	✗ No		● Yes

* In extreme high temperatures, testing of these materials is recommended.

POLYIMIDES

High Temperature White Polyimide (B-457)
 Static Dissipative Polyimide (B-477)
 High Temperature Amber Polyimide (B-426)




Part Number	Labels Per Roll	Label Dimensions		Maximum Characters Per Line For Font:			Maximum Lines Of Text For Font:			Maximum Bar Code Characters:	Through Hole Technology		SMT Top / Bottom	After Process
		A Inch (mm)	B Inch (mm)	1	4	6	1	4	6		Top	Bottom		
PTL-1-457	750	0.25 (6.35)	0.25 (6.35)	6	3	2	2	1	1	0	●	●	●	●
PTL-1-477	750	0.25 (6.35)	0.25 (6.35)	6	3	2	2	1	1	0	●	●	●	●
PTL-1-426	750	0.25 (6.35)	0.25 (6.35)	6	3	2	2	1	1	0	●	●	●	●
PTL-3-426	500	0.375 (9.52)	0.375 (9.52)	10	5	4	4	2	2	0	●	●	●	●
PTL-3-477	500	0.375 (9.52)	0.375 (9.52)	10	5	4	4	2	2	0	●	●	●	●
PTL-3-457	500	0.375 (9.52)	0.375 (9.52)	10	5	4	4	2	2	0	●	●	●	●
PTL-4-426	500	0.40 (10.16)	0.40 (10.16)	10	6	4	4	3	2	0	●	●	●	●
PTL-4-457	500	0.40 (10.16)	0.40 (10.16)	10	6	4	4	3	2	0	●	●	●	●
PTL-6-426	750	0.50 (12.70)	0.275 (6.98)	13	7	5	3	1	1	0	●	●	●	●
PTL-6-457	750	0.50 (12.70)	0.275 (6.98)	13	7	5	3	1	1	0	●	●	●	●
PTL-9-426	750	0.65 (16.51)	0.20 (5.08)	18	10	7	2	1	1	2	●	●	●	●
PTL-9-477	750	0.65 (16.51)	0.20 (5.08)	18	10	7	2	1	1	2	●	●	●	●
PTL-9-457	750	0.65 (16.51)	0.20 (5.08)	18	10	7	2	1	1	2	●	●	●	●
PTL-10-477	750	0.75 (19.05)	0.25 (6.35)	20	12	9	2	1	1	2	●	●	●	●
PTL-10-426	750	0.75 (19.05)	0.25 (6.35)	20	12	9	2	1	1	2	●	●	●	●
PTL-10-457	750	0.75 (19.05)	0.25 (6.35)	20	12	9	2	1	1	2	●	●	●	●
PTL-13-426	750	0.90 (22.86)	0.25 (6.35)	25	14	11	2	1	1	4	●	●	●	●
PTL-13-457	750	0.90 (22.86)	0.25 (6.35)	25	14	11	2	1	1	4	●	●	●	●
PTL-14-457	750	1.00 (25.40)	0.187 (4.74)	28	16	12	2	1	1	4	●	●	●	●
PTL-14-477	750	1.00 (25.40)	0.187 (4.74)	28	16	12	2	1	1	4	●	●	●	●
PTL-16-457	500	1.00 (25.40)	0.375 (9.52)	28	16	12	4	2	2	4	●	●	●	●
PTL-16-426	500	1.00 (25.40)	0.375 (9.52)	28	16	12	4	2	2	4	●	●	●	●
PTL-17-426	500	1.00 (25.40)	0.50 (12.70)	28	16	12	5	3	2	4	●	●	●	●
PTL-25-426	750	1.25 (31.75)	0.25 (6.35)	35	20	15	2	1	1	6	●	●	●	●
PTL-25-477	750	1.25 (31.75)	0.25 (6.35)	35	20	15	2	1	1	6	●	●	●	●
PTL-25-457	750	1.25 (31.75)	0.25 (6.35)	35	20	15	2	1	1	6	●	●	●	●
PTL-27-477	750	1.50 (38.10)	0.125 (3.175)	42	0	0	1	0	0	8	●	●	●	●
PTL-27-457	750	1.50 (38.10)	0.125 (3.175)	42	0	0	1	0	0	8	●	●	●	●
PTL-27-426	750	1.50 (38.10)	0.125 (3.175)	42	0	0	1	0	0	8	●	●	●	●
PTL-28-457	750	1.50 (38.10)	0.25 (6.35)	42	24	18	2	1	1	8	●	●	●	●
PTL-28-426	750	1.50 (38.10)	0.25 (6.35)	42	24	18	2	1	1	8	●	●	●	●
PTL-28-477	750	1.50 (38.10)	0.25 (6.35)	42	24	18	2	1	1	8	●	●	●	●
PTL-2-477	100	2.00 (50.80)	0.25 (6.35)	52	30	23	2	1	1	11	●	●	●	●
PTL-2-426	100	2.00 (50.80)	0.25 (6.35)	52	30	23	2	1	1	11	●	●	●	●
PTL-2-457	100	2.00 (50.80)	0.25 (6.35)	52	30	23	2	1	1	11	●	●	●	●

* Any label two inches or larger is rotated on liner.

- Yes, this material will work with this application.
- ✗ No, this material does not work with this application.
- ▲ In extreme high temperatures, testing of these materials is recommended.

TEDLAR®

Flame-Retardant White Tedlar® (B-437)



Part Number	Labels Per Roll	Label Dimensions		Maximum Characters Per Line For Font:			Maximum Lines Of Text For Font:			Maximum Bar Code Characters:	Through Hole Technology		SMT Top / Bottom	After Process
		A Inch (mm)	B Inch (mm)	1	4	6	1	4	6		Top	Bottom		
PTL-9-437	750	0.65 (16.51)	0.20 (5.08)	18	10	7	2	1	1	2	▲	✗	✗	●
PTL-10-437	750	0.75 (19.05)	0.25 (6.35)	20	12	9	2	1	1	2	▲	✗	✗	●
PTL-15-437	750	1.00 (25.40)	0.275 (6.98)	28	16	12	2	1	1	4	▲	✗	✗	●
PTL-29-437	500	1.50 (38.10)	0.50 (12.70)	42	24	18	5	3	2	8	▲	✗	✗	●


Tedlar® is a registered trademark of DuPont.

TLS2200 / TLS PC LINK ELECTRONIC APPLICATION LABELS

Electronic Application Labels


CONTINUED

PORTABLE PRINTERS & LABELS



POLYESTER

Permanent White Polyester (B-422, B-423, B-459)
Static Dissipative Polyester (B-473)
Permanent Metallized Polyester (B-428)




Part Number	Labels Per Roll	Label Dimensions		Maximum Characters Per Line For Font:			Maximum Lines Of Text For Font:			Maximum Bar Code Characters:	Through Hole Technology		SMT Top / Bottom	After Process
		A Inch (mm)	B Inch (mm)	1	4	6	1	4	6		Top	Bottom		
PTL-1-423	750	0.25 (6.35)	0.25 (6.35)	6	3	2	2	1	1	0	▲	×	×	●
PTL-1-473	750	0.25 (6.35)	0.25 (6.35)	6	3	2	2	1	1	0	▲	×	×	●
PTL-2-423	100	2.00 (50.80)	0.25 (6.35)	52	30	23	2	1	1	11	▲	×	×	●
PTL-3-423	500	0.375 (9.52)	0.375 (9.52)	10	5	4	4	2	2	0	▲	×	×	●
PTL-4-423	500	0.40 (10.16)	0.40 (10.16)	10	6	4	4	3	2	0	▲	×	×	●
PTL-5-423	750	0.50 (12.70)	0.20 (5.08)	13	7	5	2	1	1	0	▲	×	×	●
PTL-6-473	750	0.50 (12.70)	0.275 (6.98)	13	7	5	3	1	1	0	▲	×	×	●
PTL-6-423	750	0.50 (12.70)	0.275 (6.98)	13	7	5	3	1	1	0	▲	×	×	●
PTL-7-423	500	0.50 (12.70)	0.50 (12.70)	13	7	5	5	3	2	0	▲	×	×	●
PTL-5-473	750	0.50 (12.70)	0.20 (5.08)	13	7	5	2	1	1	0	▲	×	×	●
PTL-9-423	750	0.65 (16.51)	0.20 (5.08)	18	10	7	2	1	1	2	▲	×	×	●
PTL-9-473	750	0.65 (16.51)	0.20 (5.08)	18	10	7	2	1	1	2	▲	×	×	●
PTL-10-423	750	0.75 (19.05)	0.25 (6.35)	20	12	9	2	1	1	2	▲	×	×	●
PTL-10-473	750	0.75 (19.05)	0.25 (6.35)	20	12	9	2	1	1	2	▲	×	×	●
PTL-13-423	750	0.90 (22.86)	0.25 (6.35)	25	14	11	2	1	1	4	▲	×	×	●
PTL-14-423	750	1.00 (25.40)	0.187 (4.74)	28	16	12	2	1	1	4	▲	×	×	●
PTL-15-423	750	1.00 (25.40)	0.275 (6.98)	28	16	12	2	1	1	4	▲	×	×	●
PTL-15-428	750	1.00 (25.40)	0.275 (6.98)	28	16	12	2	1	1	4	▲	×	×	●
PTL-16-473	500	1.00 (25.40)	0.375 (9.52)	28	16	12	4	2	2	4	▲	×	×	●
PTL-16-423	500	1.00 (25.40)	0.375 (9.52)	28	16	12	4	2	2	4	▲	×	×	●
BPTL-16-423	5000	1.00 (25.40)	0.375 (9.52)	28	16	12	4	2	2	4	▲	×	×	●
PTL-17-473	500	1.00 (25.40)	0.50 (12.70)	28	16	12	5	3	2	4	▲	×	×	●
PTL-17-423	500	1.00 (25.40)	0.50 (12.70)	28	16	12	5	3	2	4	▲	×	×	●
PTL-17-428	500	1.00 (25.40)	0.50 (12.70)	28	16	12	5	3	2	4	▲	×	×	●
PTL-19-422	250	1.00 (25.40)	1.00 (25.40)	28	16	12	12	7	6	4	▲	×	×	●
PTL-19-423	250	1.00 (25.40)	1.00 (25.40)	28	16	12	12	7	6	4	▲	×	×	●
BPTL-19-423	2500	1.00 (25.40)	1.00 (25.40)	28	16	12	12	7	6	4	▲	×	×	●
PTL-20-423	100	2.00 (50.80)	1.00 (25.40)	52	30	23	12	7	6	11	▲	×	×	●
BPTL-20-423	1000	2.00 (50.80)	1.00 (25.40)	52	30	23	12	7	6	11	▲	×	×	●
PTL-20-459	100	2.00 (50.80)	1.00 (25.40)	52	30	23	12	7	6	11	▲	×	×	●
PTL-25-423	750	1.25 (31.75)	0.25 (6.35)	35	20	15	2	1	1	6	▲	×	×	●
PTL-26-423	100	2.75 (69.85)	1.25 (31.75)	50	29	19	13	6	4	18	▲	×	×	●
PTL-26-459	100	2.75 (69.85)	1.25 (31.75)	50	46	34	15	9	7	18	▲	×	×	●
PTL-27-423	750	1.50 (38.10)	0.125 (3.18)	42	0	0	1	0	0	8	▲	×	×	●
PTL-28-423	750	1.50 (38.10)	0.25 (6.35)	42	24	18	2	1	1	8	▲	×	×	●
PTL-28-473	750	1.50 (38.10)	0.25 (6.35)	42	24	18	2	1	1	8	▲	×	×	●
PTL-29-423	500	1.50 (38.10)	0.50 (12.70)	42	24	18	5	3	2	8	▲	×	×	●
BPTL-29-423	5000	1.50 (38.10)	0.50 (12.70)	42	24	18	5	3	2	8	▲	×	×	●
PTL-29-459	500	1.50 (38.10)	0.50 (12.70)	42	24	18	5	3	2	8	▲	×	×	●
PTL-30-459	250	1.50 (38.10)	0.75 (19.05)	42	24	18	9	5	4	8	▲	×	×	●
PTL-37-423	100	3.00 (76.20)	1.90 (48.26)	50	50	37	22	14	11	20	▲	×	×	●
PTL-38-423	100	4.00 (101.6)	1.90 (48.26)	50	50	50	22	14	11	25	▲	×	×	●
PTL-38-459	100	4.00 (101.6)	1.90 (48.26)	50	50	50	22	14	11	25	▲	×	×	●

* Any label two inches or larger is rotated on liner.

VINYL CLOTH

White Vinyl Cloth Repositional Adhesive (B-400)



Part Number	Labels Per Roll	Label Dimensions		Maximum Characters Per Line For Font:			Maximum Lines Of Text For Font:			Maximum Bar Code Characters:	Through Hole Technology		SMT Top / Bottom	After Process
		A Inch (mm)	B Inch (mm)	1	4	6	1	4	6		Top	Bottom		
PTL-7-400	500	0.50 (12.70)	0.50 (12.70)	13	7	5	5	3	2	0	▲	×	×	●
PTL-10-400	750	0.75 (19.05)	0.25 (6.35)	6	3	2	9	5	4	0	▲	×	×	●
PTL-15-400	750	1.00 (25.40)	0.275 (6.98)	28	16	12	2	1	1	0	▲	×	×	●
PTL-16-400	500	1.00 (25.40)	0.375 (9.52)	10	5	4	12	7	6	0	▲	×	×	●
PTL-17-400	500	1.00 (25.40)	0.50 (12.70)	28	16	12	5	3	2	0	▲	×	×	●
PTL-29-400	500	1.50 (38.10)	0.50 (12.70)	13	7	5	18	11	9	0	▲	×	×	●
BPTL-29-400	5000	1.50 (38.10)	0.50 (12.70)	13	7	5	18	11	9	0	▲	×	×	●
PTL-32-400	250	1.50 (38.10)	1.50 (38.10)	42	24	18	18	11	9	0	▲	×	×	●

* Vinyl cloth material is not recommended for bar code printing.

- Yes, this material will work with this application.
- × No, this material does not work with this application.
- ▲ In extreme high temperatures, testing of these materials is recommended.

TLS2200 / TLS PC LINK ELECTRONIC APPLICATION LABELS